

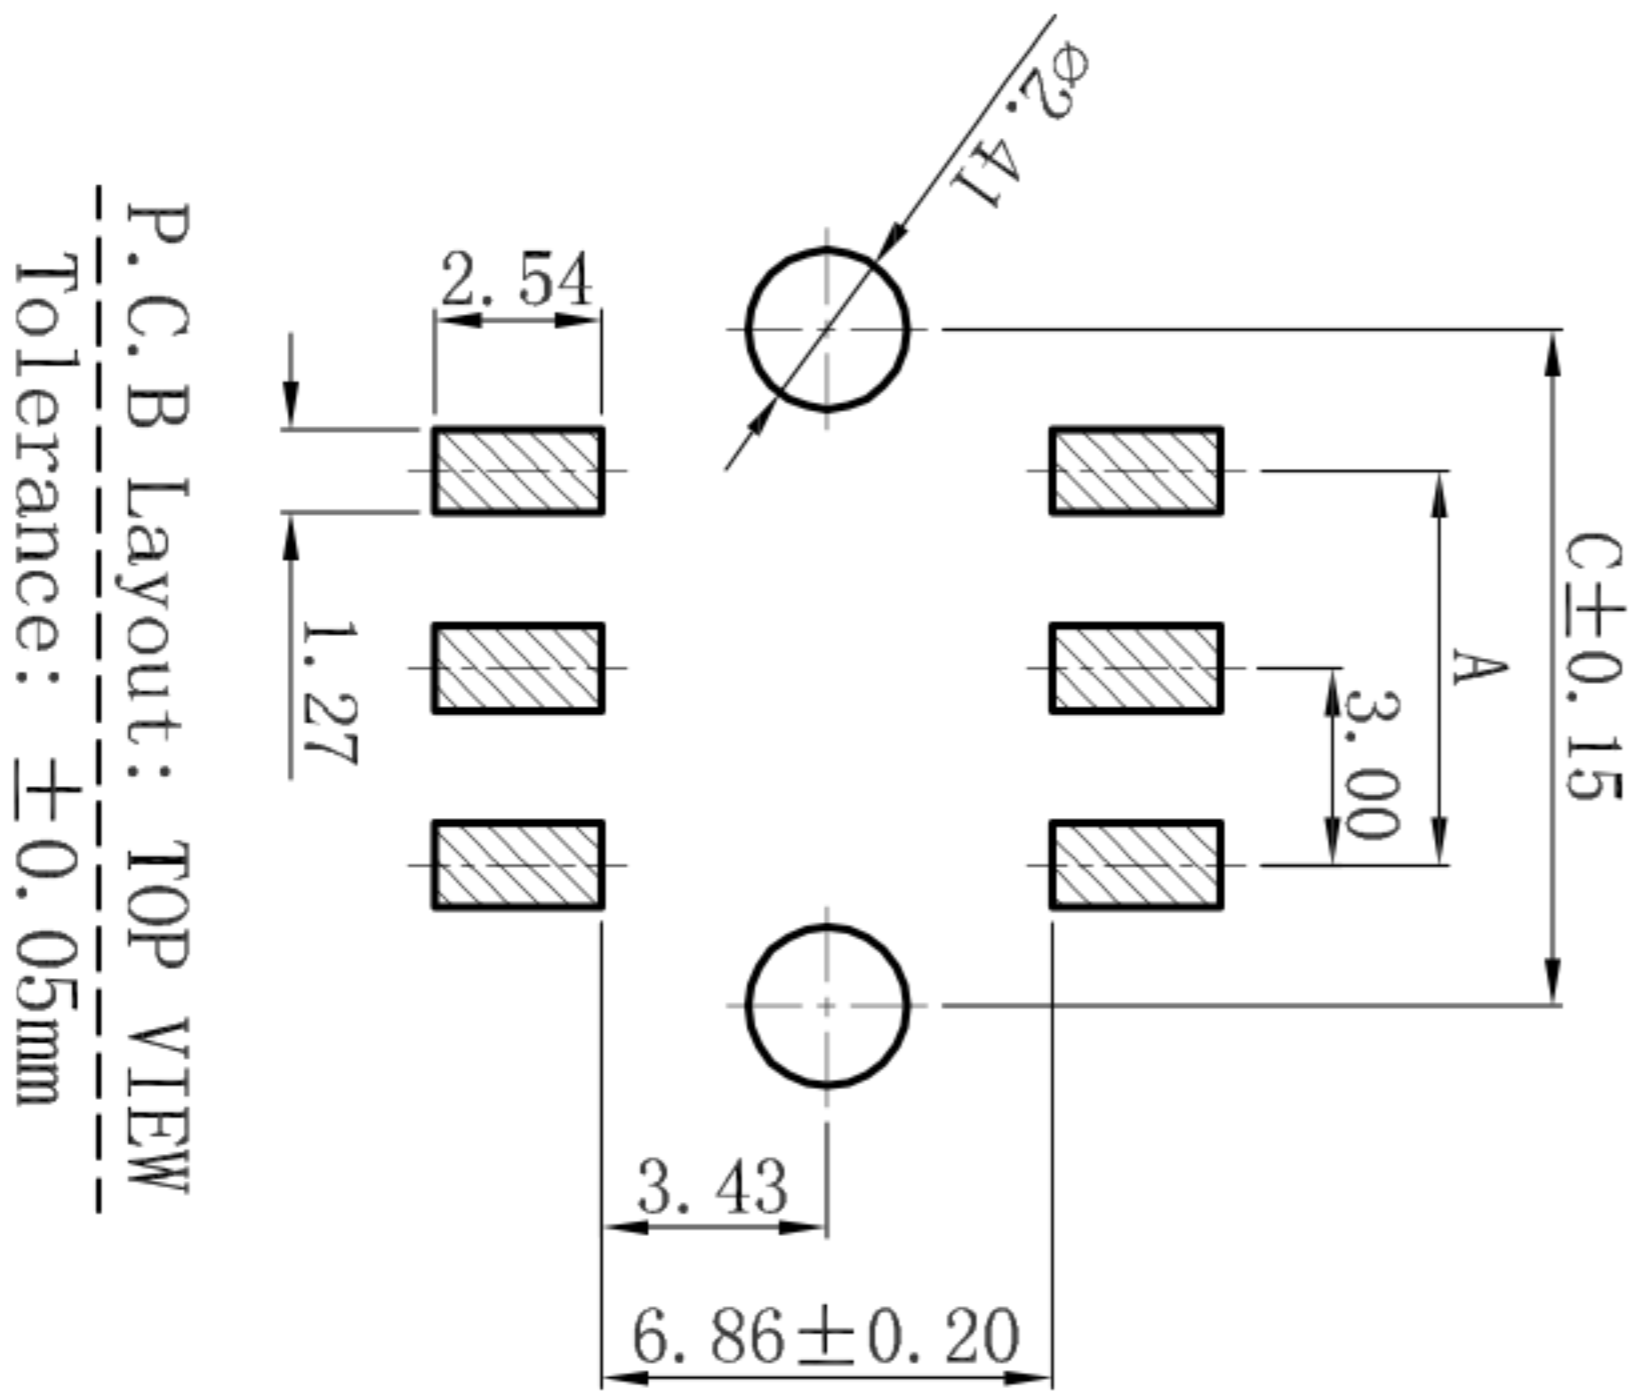
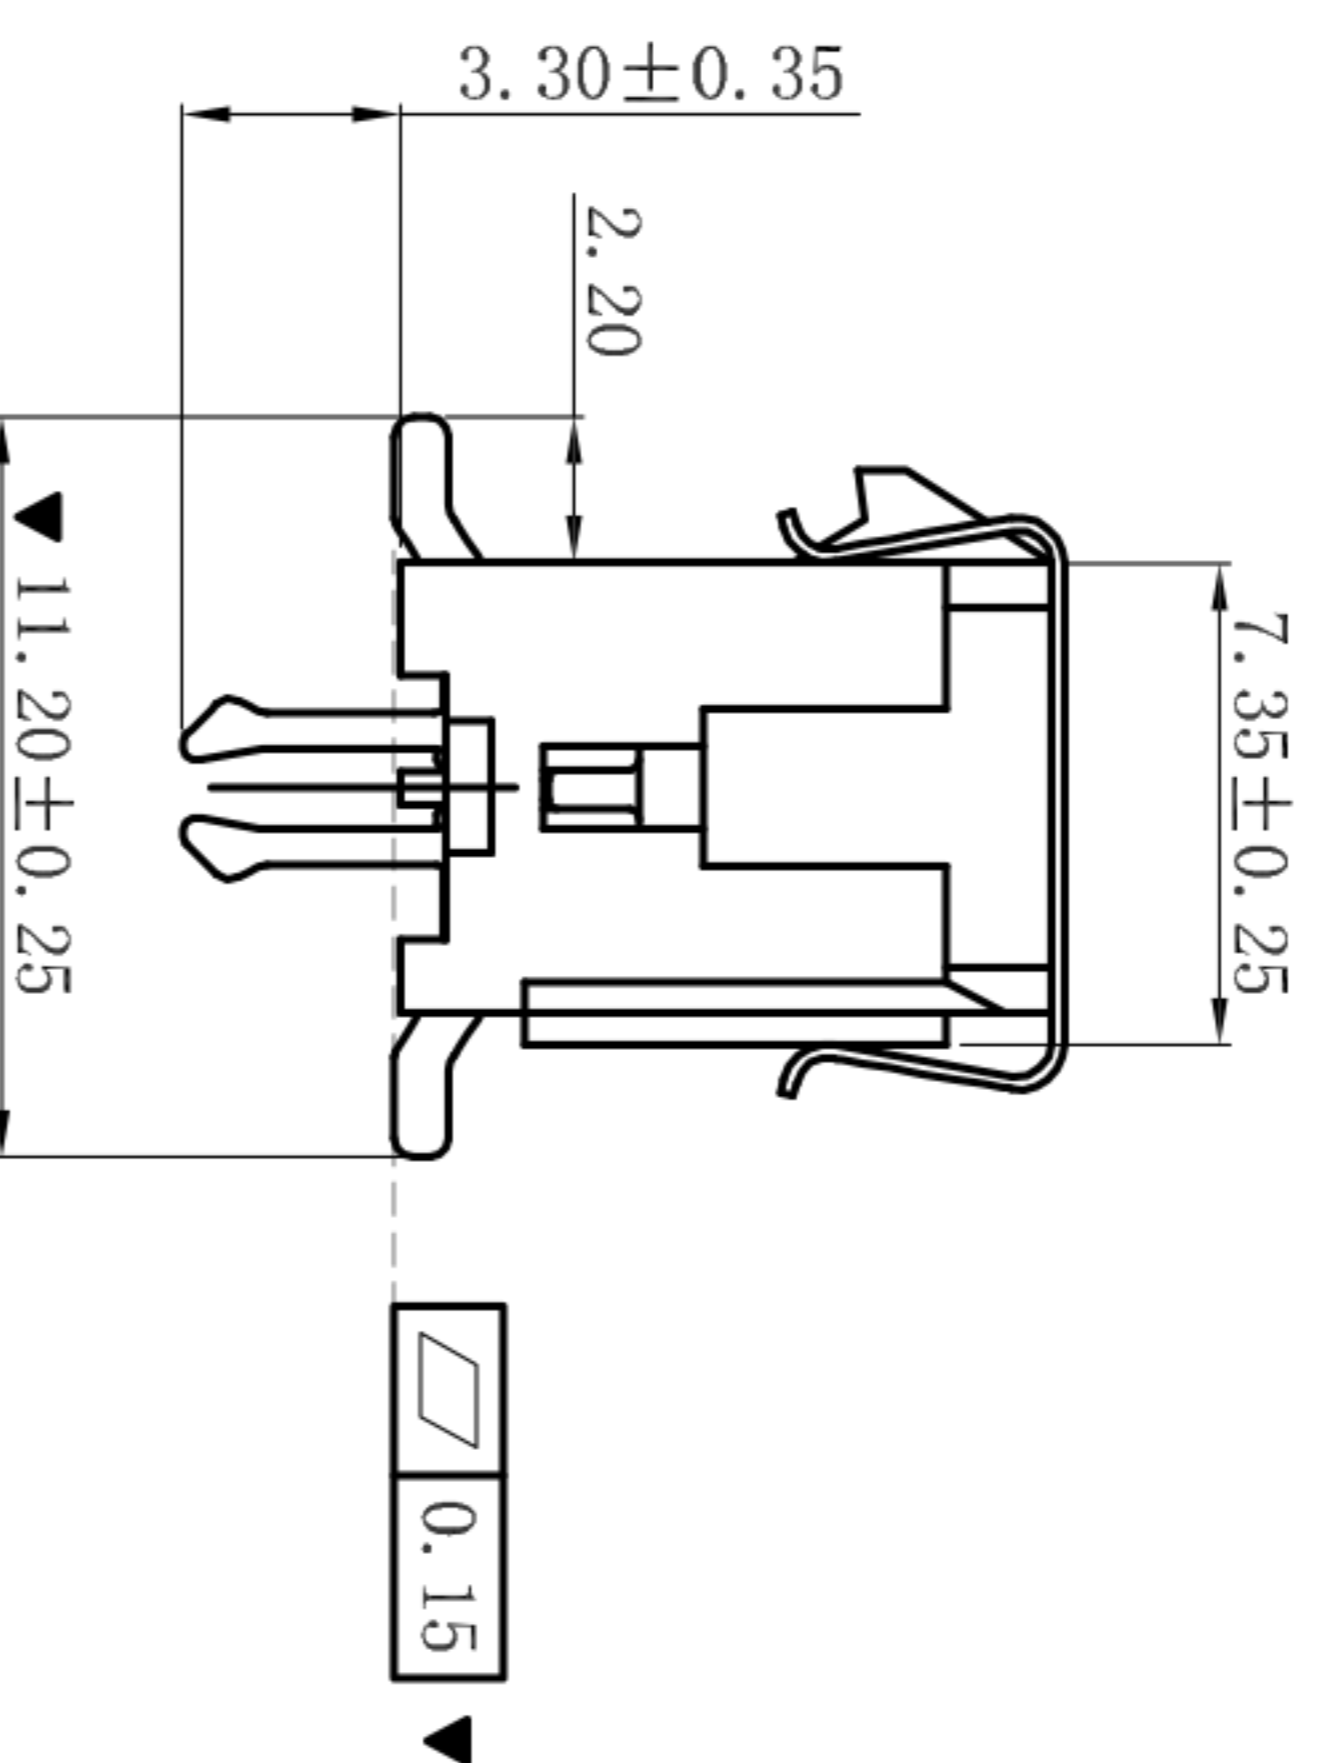
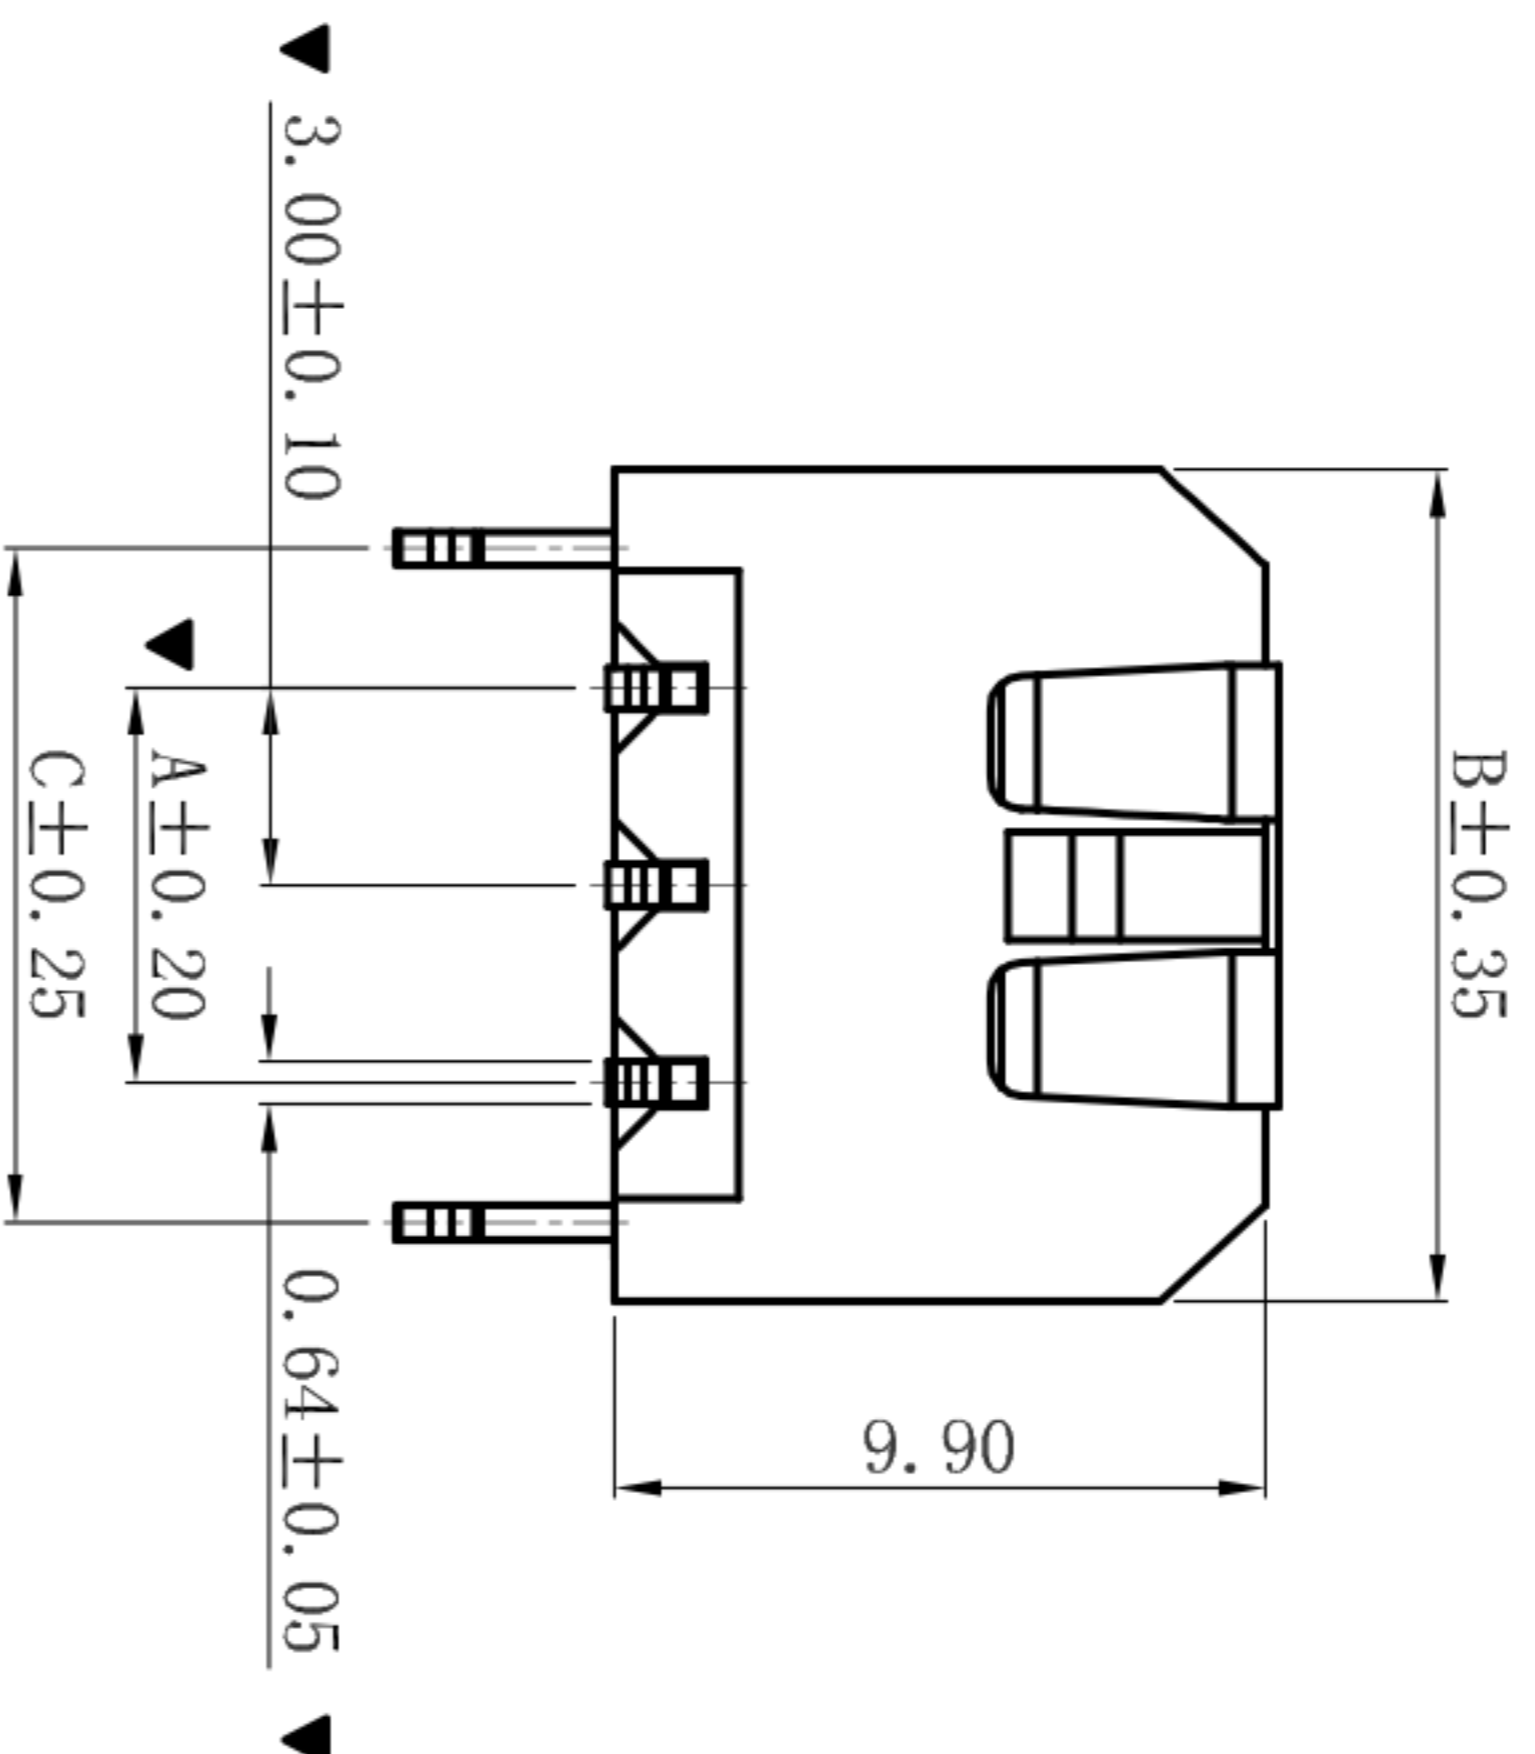


WITHOUT CAP VIEW

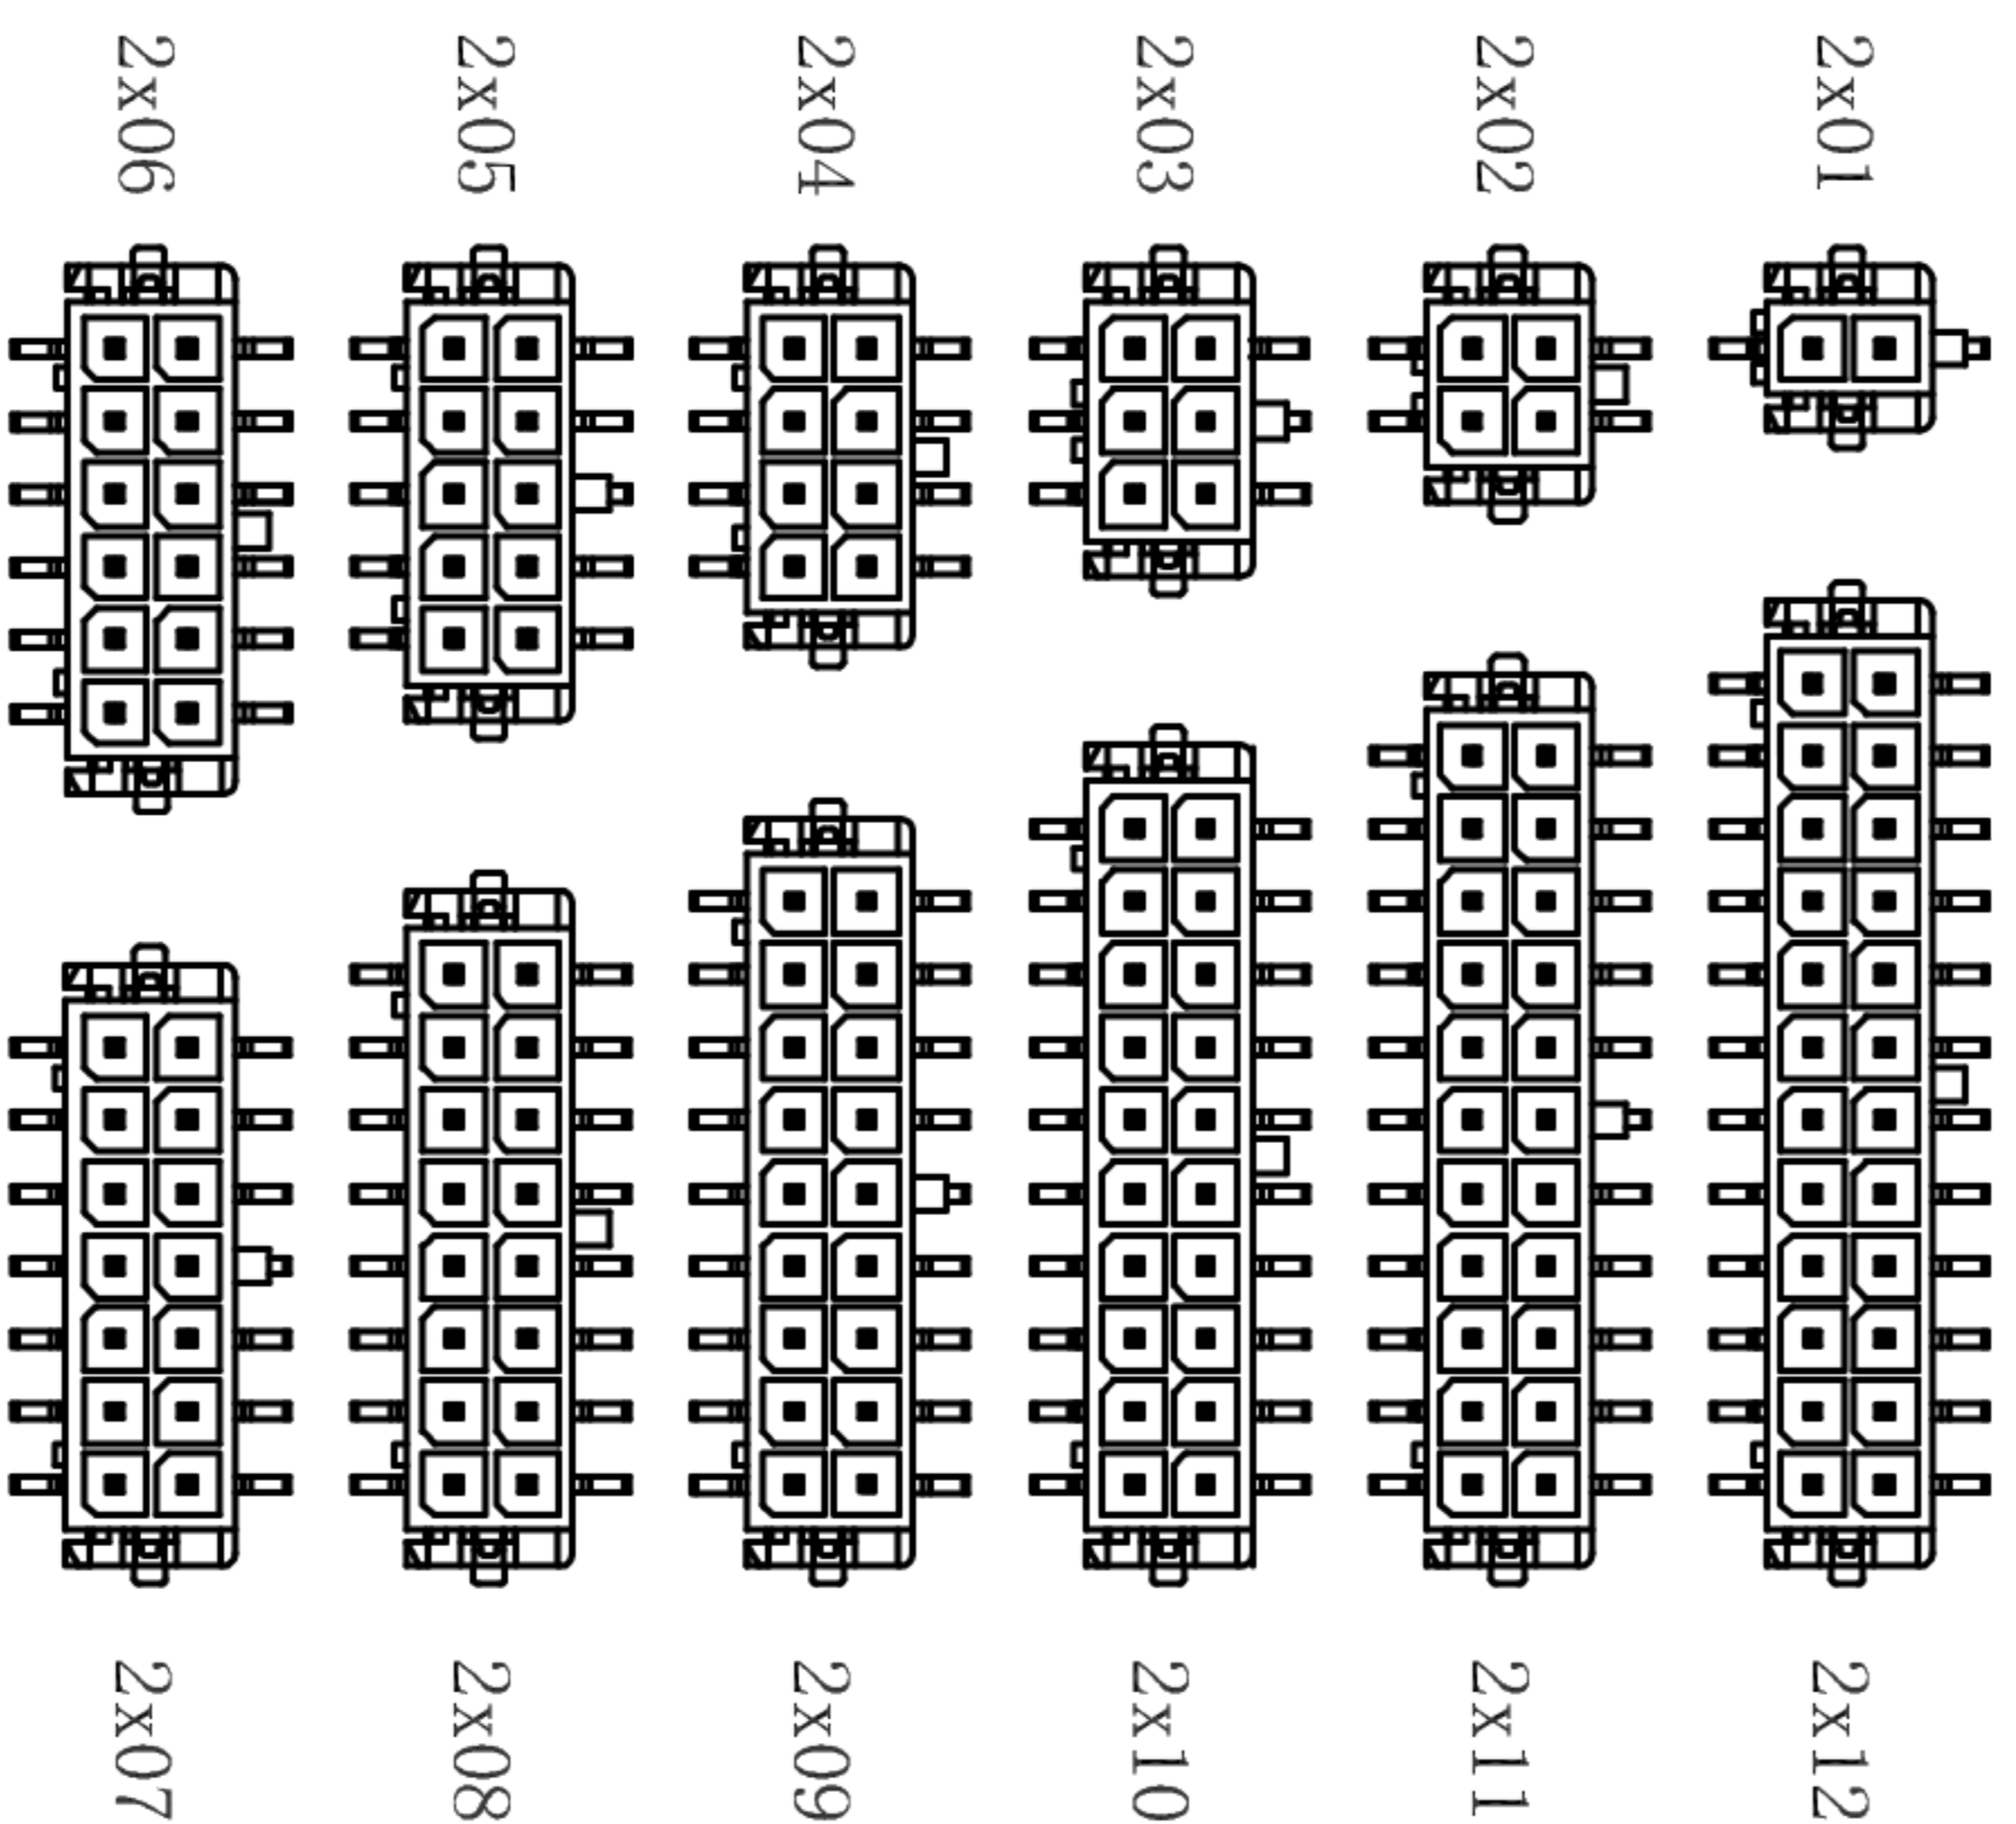

P.C.B Layout: TOP VIEW
Tolerance: ±0.05mm

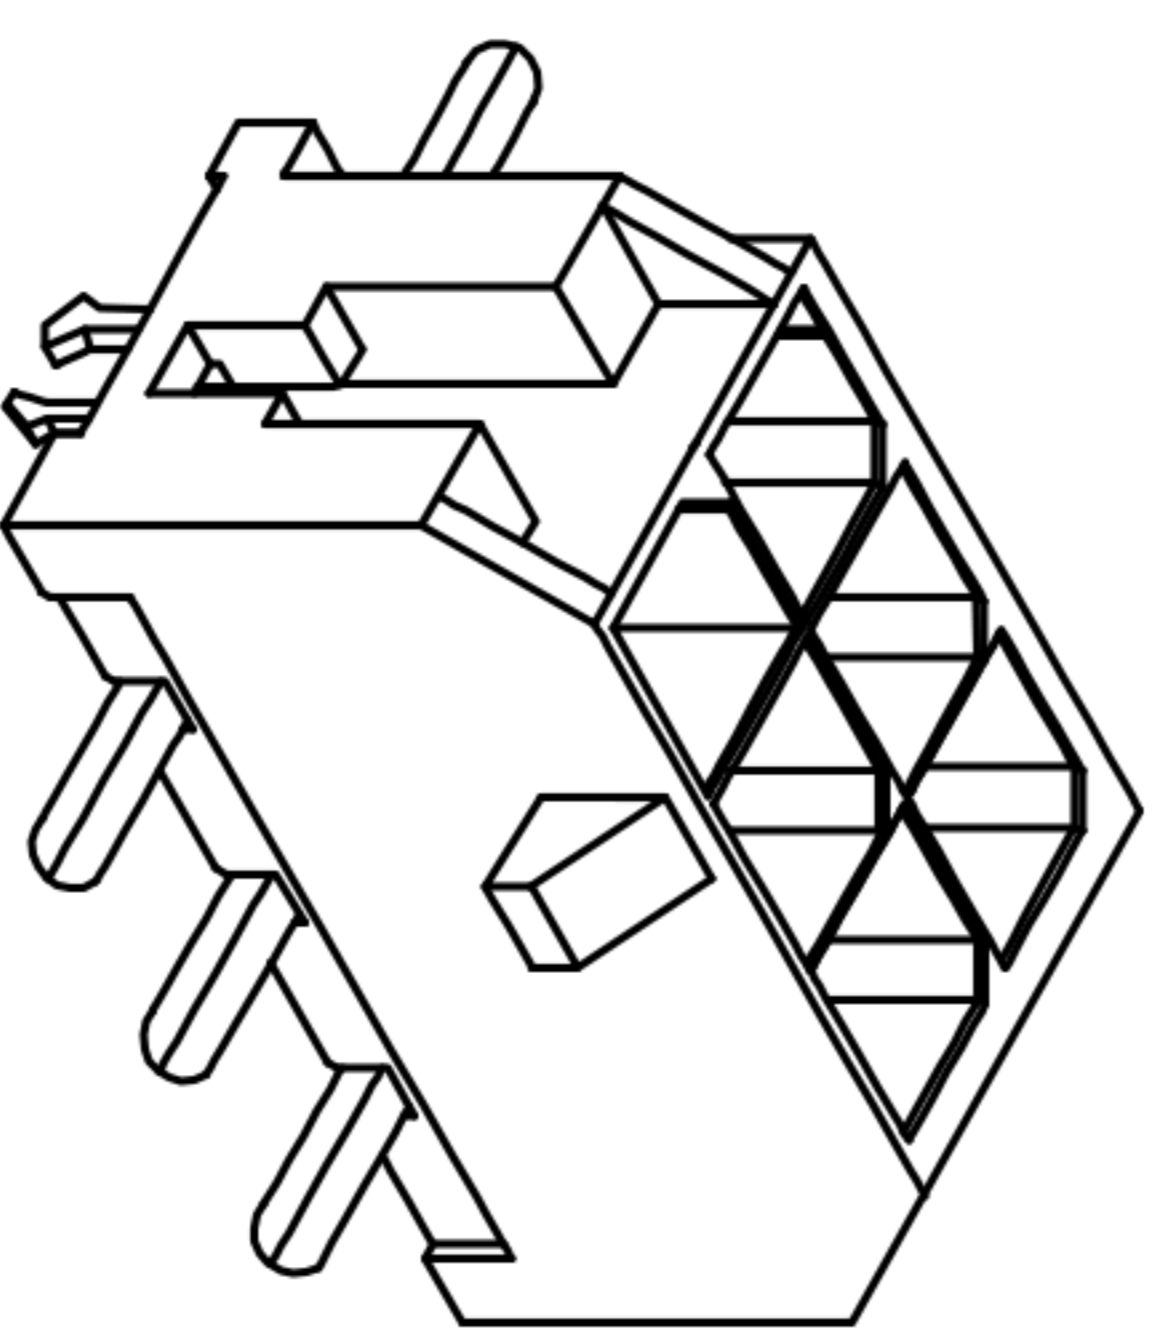

Poles	Dimensions (mm)		
	A	B	C
2x01	--	6.65	4.30
2x02	3.00	9.65	7.30
2x03	6.00	12.65	10.30
2x04	9.00	15.65	13.30
2x05	12.00	18.65	16.30
2x06	15.00	21.65	19.30
2x07	18.00	24.65	22.30
2x08	21.00	27.65	25.30
2x09	24.00	30.65	28.30
2x10	27.00	33.65	31.30
2x11	30.00	36.65	34.30
2x12	33.00	39.65	37.30

- SPECIFICATIONS**
- Voltage rating: 250V AC, DC
 - Current rating: 5A, AC, DC
 - Withstanding Voltage: 1500V AC/minute
 - Insulation resistance: 1000MΩ min
 - Temperature range: -40° C~+105° C
 - Contact resistance: 20mΩ max
- WAFER**
- Part No.: 3045WS-2xNP-L
 - Poles : 02-24P
 - Housing Material: LCP UL94V-0 Black
 - Ter Material: Brass
 - Solder Tabs Material: Brass
 - Contact Area Plating: Matte Tin Plating
 - Cap: Stainless Steel
- The Dimension Marked “▼” Must Be Recorded

APPROVALS		DATE	TITLE:	
DRAWN	ZHIWEI.CHEN	2015.07.07	PART NO. GP01-3045WS-2xNP-L	
CHECKED			SCALE: 1:1	
APPROVALS			PROJ:	
TOLERANCES ARE		ANGLE	UNIT: mm	SHEET 1 OF 1
30~以上	±0.30	±2°		
10~30	±0.20			
5~10	±0.15			
~ 5	±0.10			
ECN NO.	REV.	DATE.	DESCRIPTION.	
	A		NEW	



深圳市联丰电子有限公司
SHENZHEN LIANFENG ELECTRONIC CO.,LTD