


Part No.	DIM.A	DIM.B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86

Part No.	DIM.A	DIM.B
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
20	48.26	50.80

- 技术参数 SPECIFICATIONS**
- ◆ 间距: 2.54 Pitch: 2.54
 - ◆ 极数: 2~20 Poles: 2~20
 - ◆ 适用线规: AWG#28~#22
 - ◆ Applicable Wire: AWG#28~#22
 - ◆ 额定电压: 250V DC,AC(rms)
 - ◆ Rated voltage: 250V DC,AC(rms)
 - ◆ 额定电流: 2.5A AC,DC
 - ◆ Rated Current: 2.5A AC,DC
 - ◆ 耐压值: 1500V AC/minute
 - ◆ Withstand voltage: 1500V AC/min.
 - ◆ 工作温度: -25°C ~ +85°C
 - ◆ Working Temp: -25°C ~ +85°C
 - ◆ 绝缘电阻: ≥1000 MΩ
 - ◆ Insulation resistance: ≥1000 MΩ
 - ◆ 接触电阻: ≤20mΩ
 - ◆ Contact resistance: ≤20mΩ

- 材料 MATERIAL**
- ◆ Wafer: 尼龙66 (Nylon66) , UL94-V0
 - ◆ PIN: 黄铜Brass

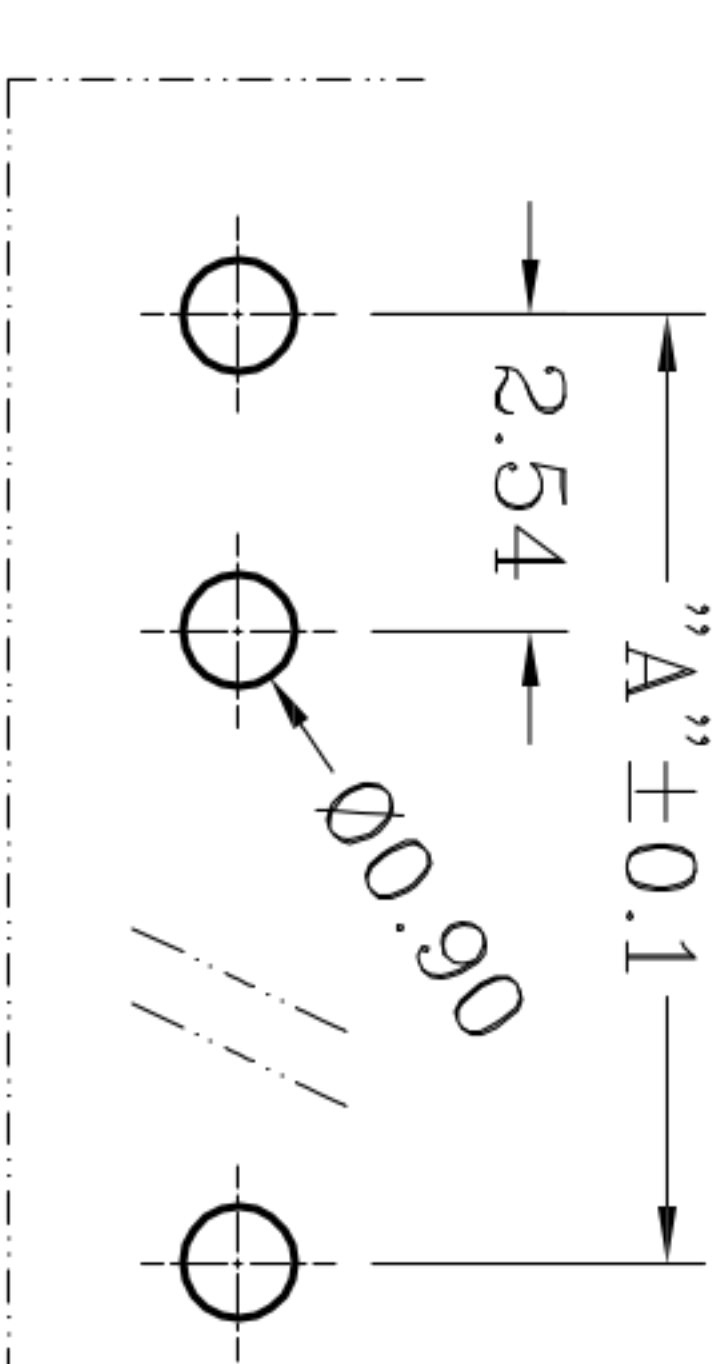

P.C.B LAYOUT

APPROVALS		DATE	 深圳市联丰电子有限公司 SHENZHEN LINFENG ELECTRONIC CO.,LTD
DRAWN	ZHIWEI.CHEN	2015.07.07	
CHECKED			
APPROVALS			TITLE:

TOLERANCES ARE		PART NO.	UNIT:	SCALE:	PROJ.
30~以上	±0.30	GP01-2543W-NP	mm	1:1	PROJ.
10~30	±0.20				
5~10	±0.15				
~ 5	±0.10				

ECN NO.	REV.	DATE.	DESCRIPTION.
	A		NEW