


P.C.B. LAYOUT

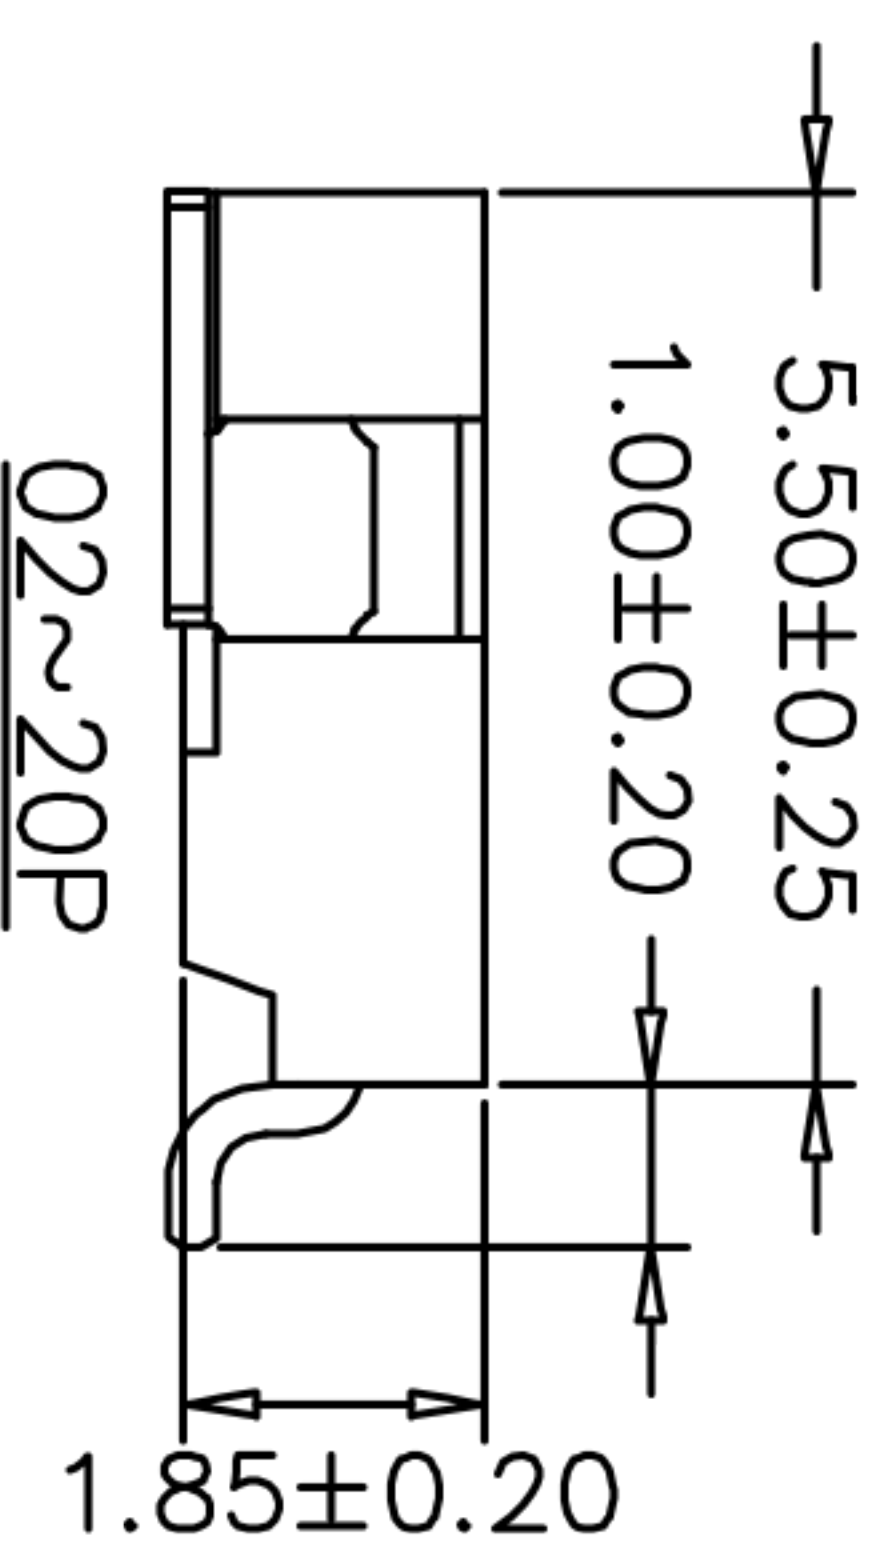

SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 125V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Phosphor Bronze/Gold-plated
 Solder Tabs: Brass/Gold-plated
 Material: Nylon 6T,UL94V-0
 Color: Natural(Beige)

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
1255WR-S-02P	1.25	7.65	8.07
1255WR-S-03P	2.50	8.90	9.32
1255WR-S-04P	3.75	10.15	10.57
1255WR-S-05P	5.00	11.40	11.82
1255WR-S-06P	6.25	12.65	13.07
1255WR-S-07P	7.50	13.90	14.32
1255WR-S-08P	8.75	15.15	15.57
1255WR-S-09P	10.00	16.40	16.82
1255WR-S-10P	11.25	17.65	18.07
1255WR-S-11P	12.50	18.90	19.32
1255WR-S-12P	13.75	20.15	20.57
1255WR-S-14P	16.25	22.65	23.07
1255WR-S-15P	17.50	23.90	24.32
1255WR-S-16P	18.75	25.15	25.57
1255WR-S-20P	23.75	30.15	30.57
1255WR-S-30P	36.25	42.65	43.07

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	TITLE:	
DRAWN	ZHIWEI.CHEN	2015.07.07	PART NO. GP01-1255WRS-NP	
CHECKED			SCALE: 1:1	
APPROVALS			PROJ. SHEET 1 OF 1	
TOLERANCES ARE		ANGLE	DRAWING NO.	
30°以上	±0.30	±2°		
10~30	±0.20			
5~10	±0.15			
~5	±0.10			



深圳市联丰电子有限公司
 SHENZHEN LINFENG ELECTRONIC CO.,LTD