ROHS

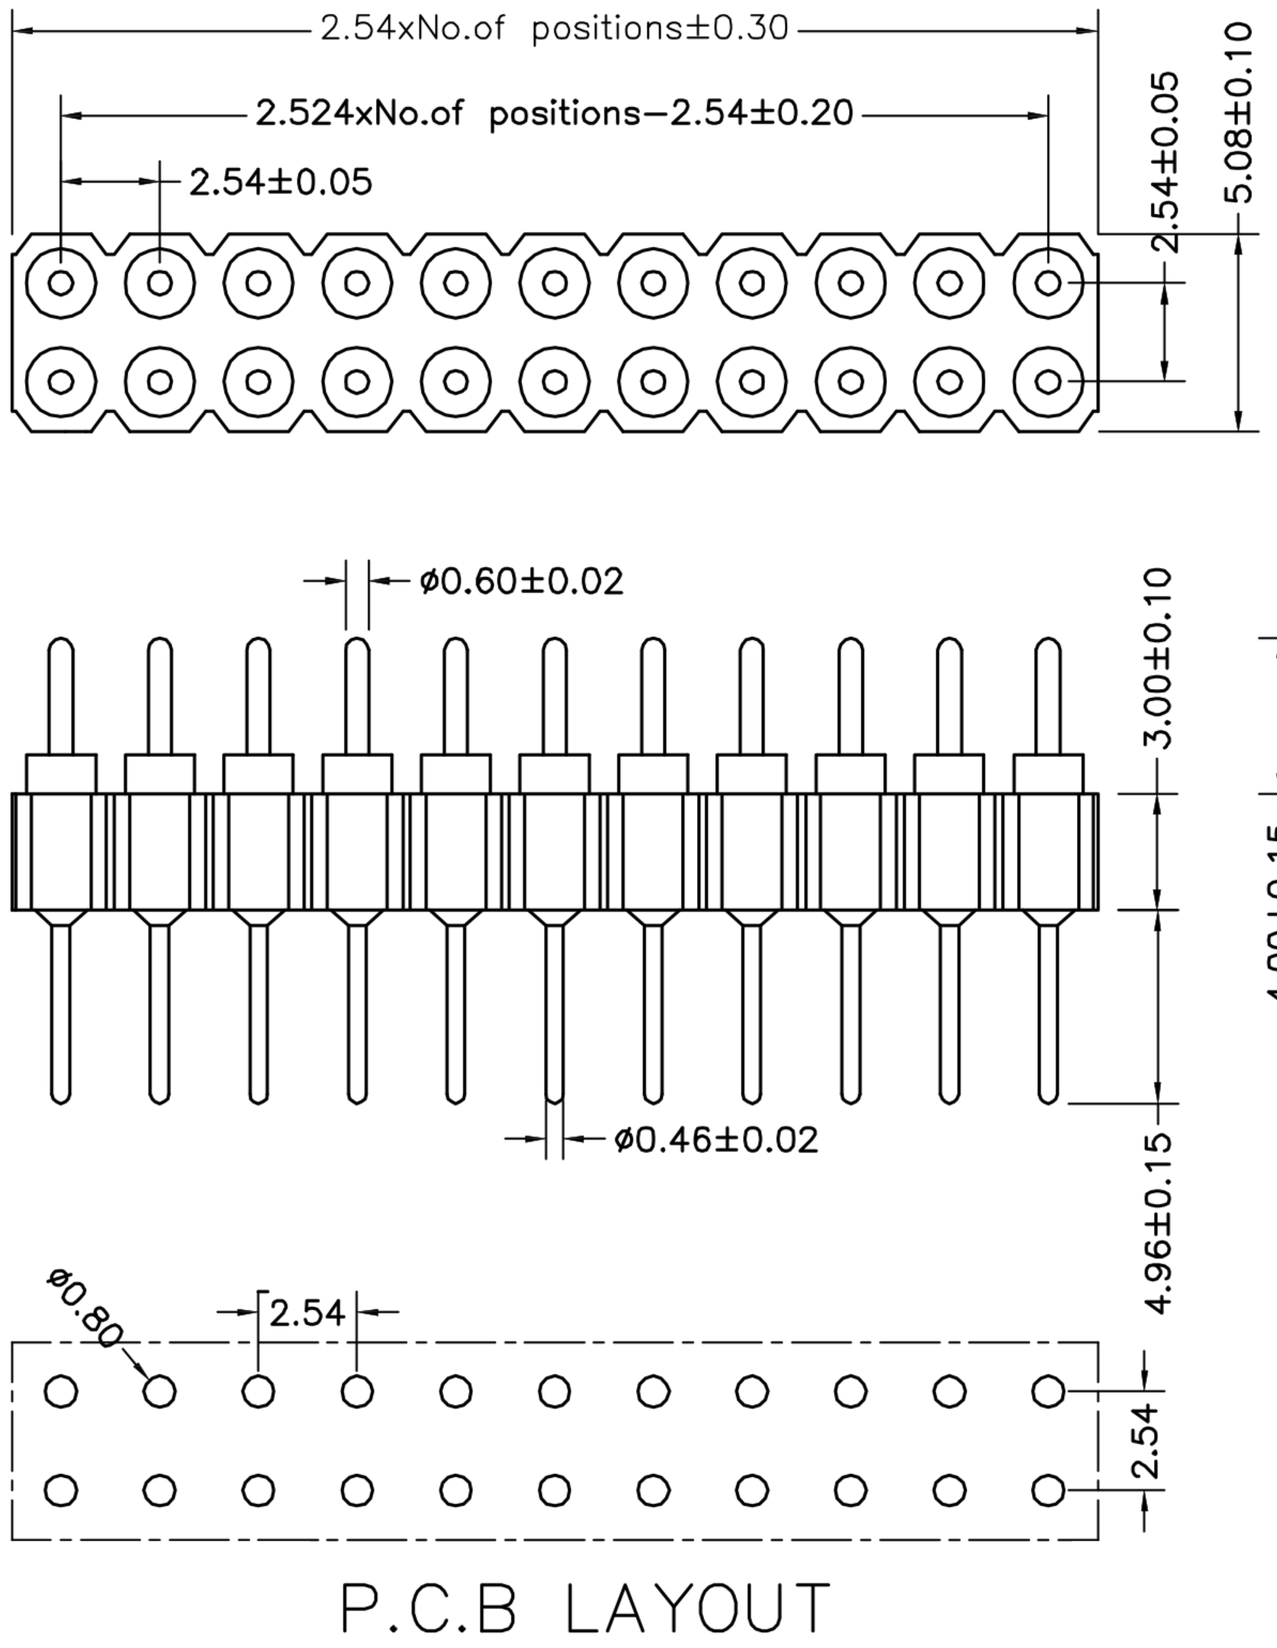

P.C.B LAYOUT

Technical Data
Materlal:
Pin(outer sleeve): Brass,machined CuZn38Pb2
Plating(outer sleeve):
Tin Plated: 2μm/80μm"Nl,5μm/200 μ"Sn
Gold Plated: 2μm"/80 μm"Ni,0.8 μ" gold
Insuiator: PPS UL94V−0

Electrical:
Current rating: 3Amps/contact max.
Contact resistance: ≤4mΩ/contact
Insuiation resistance: ≥1000MΩ at V=100V
Operaing voltage: 60VAC/DC

Mechanical:
Mechanical lige: min 500 cycle
Operaling temperature: −40℃ to+105℃
Soldering temperature: +255℃

APPROVALS		DATE	深圳市联丰盈电子有限公司 SHENZHEN LINFENYING ELECTRONIC CO.,LTD	
DRAWN	ZHIWEI.CHEN	2015.07.07		
CHECKED			TITLE:	Double socket connector 2.54mm L=11.96mm H=3.0mm 常规型
APPROVALS			PART NO.	GP22-2520WV-2xNP-1196A
TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~ 5 ±0.10		ANGLE ±2°	UNIT: mm	SCALE: 1:1 PROJ:
			DRAWING NO.	SHEET 1 OF 1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
———	A	———	NEW	———	———	———