

SPECIFICATIONS

Current Rating: 1Amps

Insulator resistance: 1000 Megchms min.

Dielectric Withstanding: AC 500V


Operating Temperature: -40° +105° C

Max Processing Temp: 230°~for 30 60 seconds
(260° for 10wseconds)

Contact Material: Brass

Insulator Material: NYLON-6T

UNSPECIFIED TOLERANCE: ± 0.20

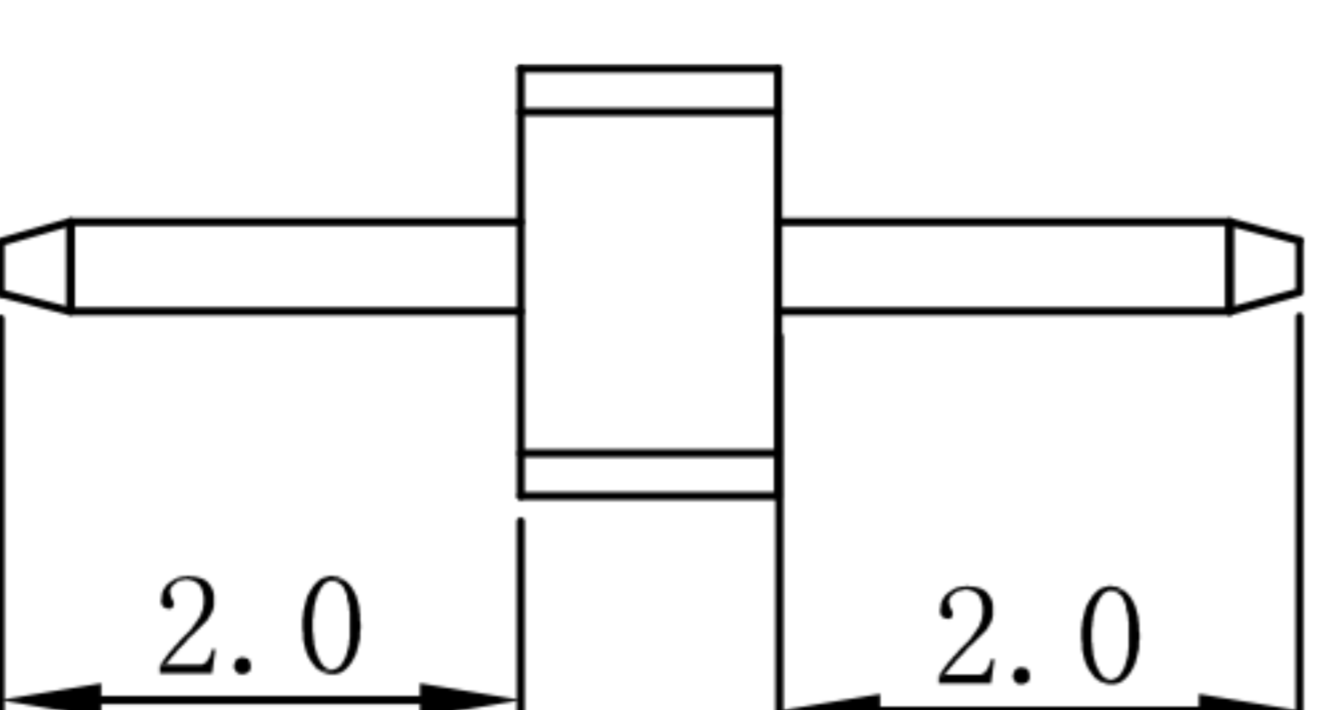

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	TITLE:	
DRAWN	ZHIWEI.CHEN	2015.07.07	
CHECKED			
APPROVALS			
TOLERANCES ARE		30~以上 ±0.30	ANGLE	PART NO.
	10~30 ±0.20	5~10 ±0.15	±2°	UNIT: mm
	~ 5 ±0.10			SCALE: 1:1
				PROJ:
				DRAWING NO.
				SHEET 1 OF 1



深圳市联丰电子有限公司
SHENZHEN LINFENYING ELECTRONIC CO.,LTD