





Specifications/备注 (Remark)

1-材料 (MATERIAL)

胶芯: PA9T/LCP+30%G.F UL94V-0, 颜色: 黑色
 Housing: PA9T/LCP+30%G.F UL94V-0, Color: Black
 四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN
 Contact: Brass/0.8u"MIN GOLD PLATING
 OVER ALL 30u"MIN NICKEL UNDERPLATING
 OVER ALL

2-特性 (characteristics):

额定电流: 1 AMP
 Rating Current: 1 AMP
 接触阻抗: 20mΩ MAX.
 Contact Resistance: 20mΩ MAX.
 绝缘阻抗: 1000MΩMIN.
 Insulating Resistance: 1000MΩMIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40度至+105度
 Temperature Range: -40°C to +105°C

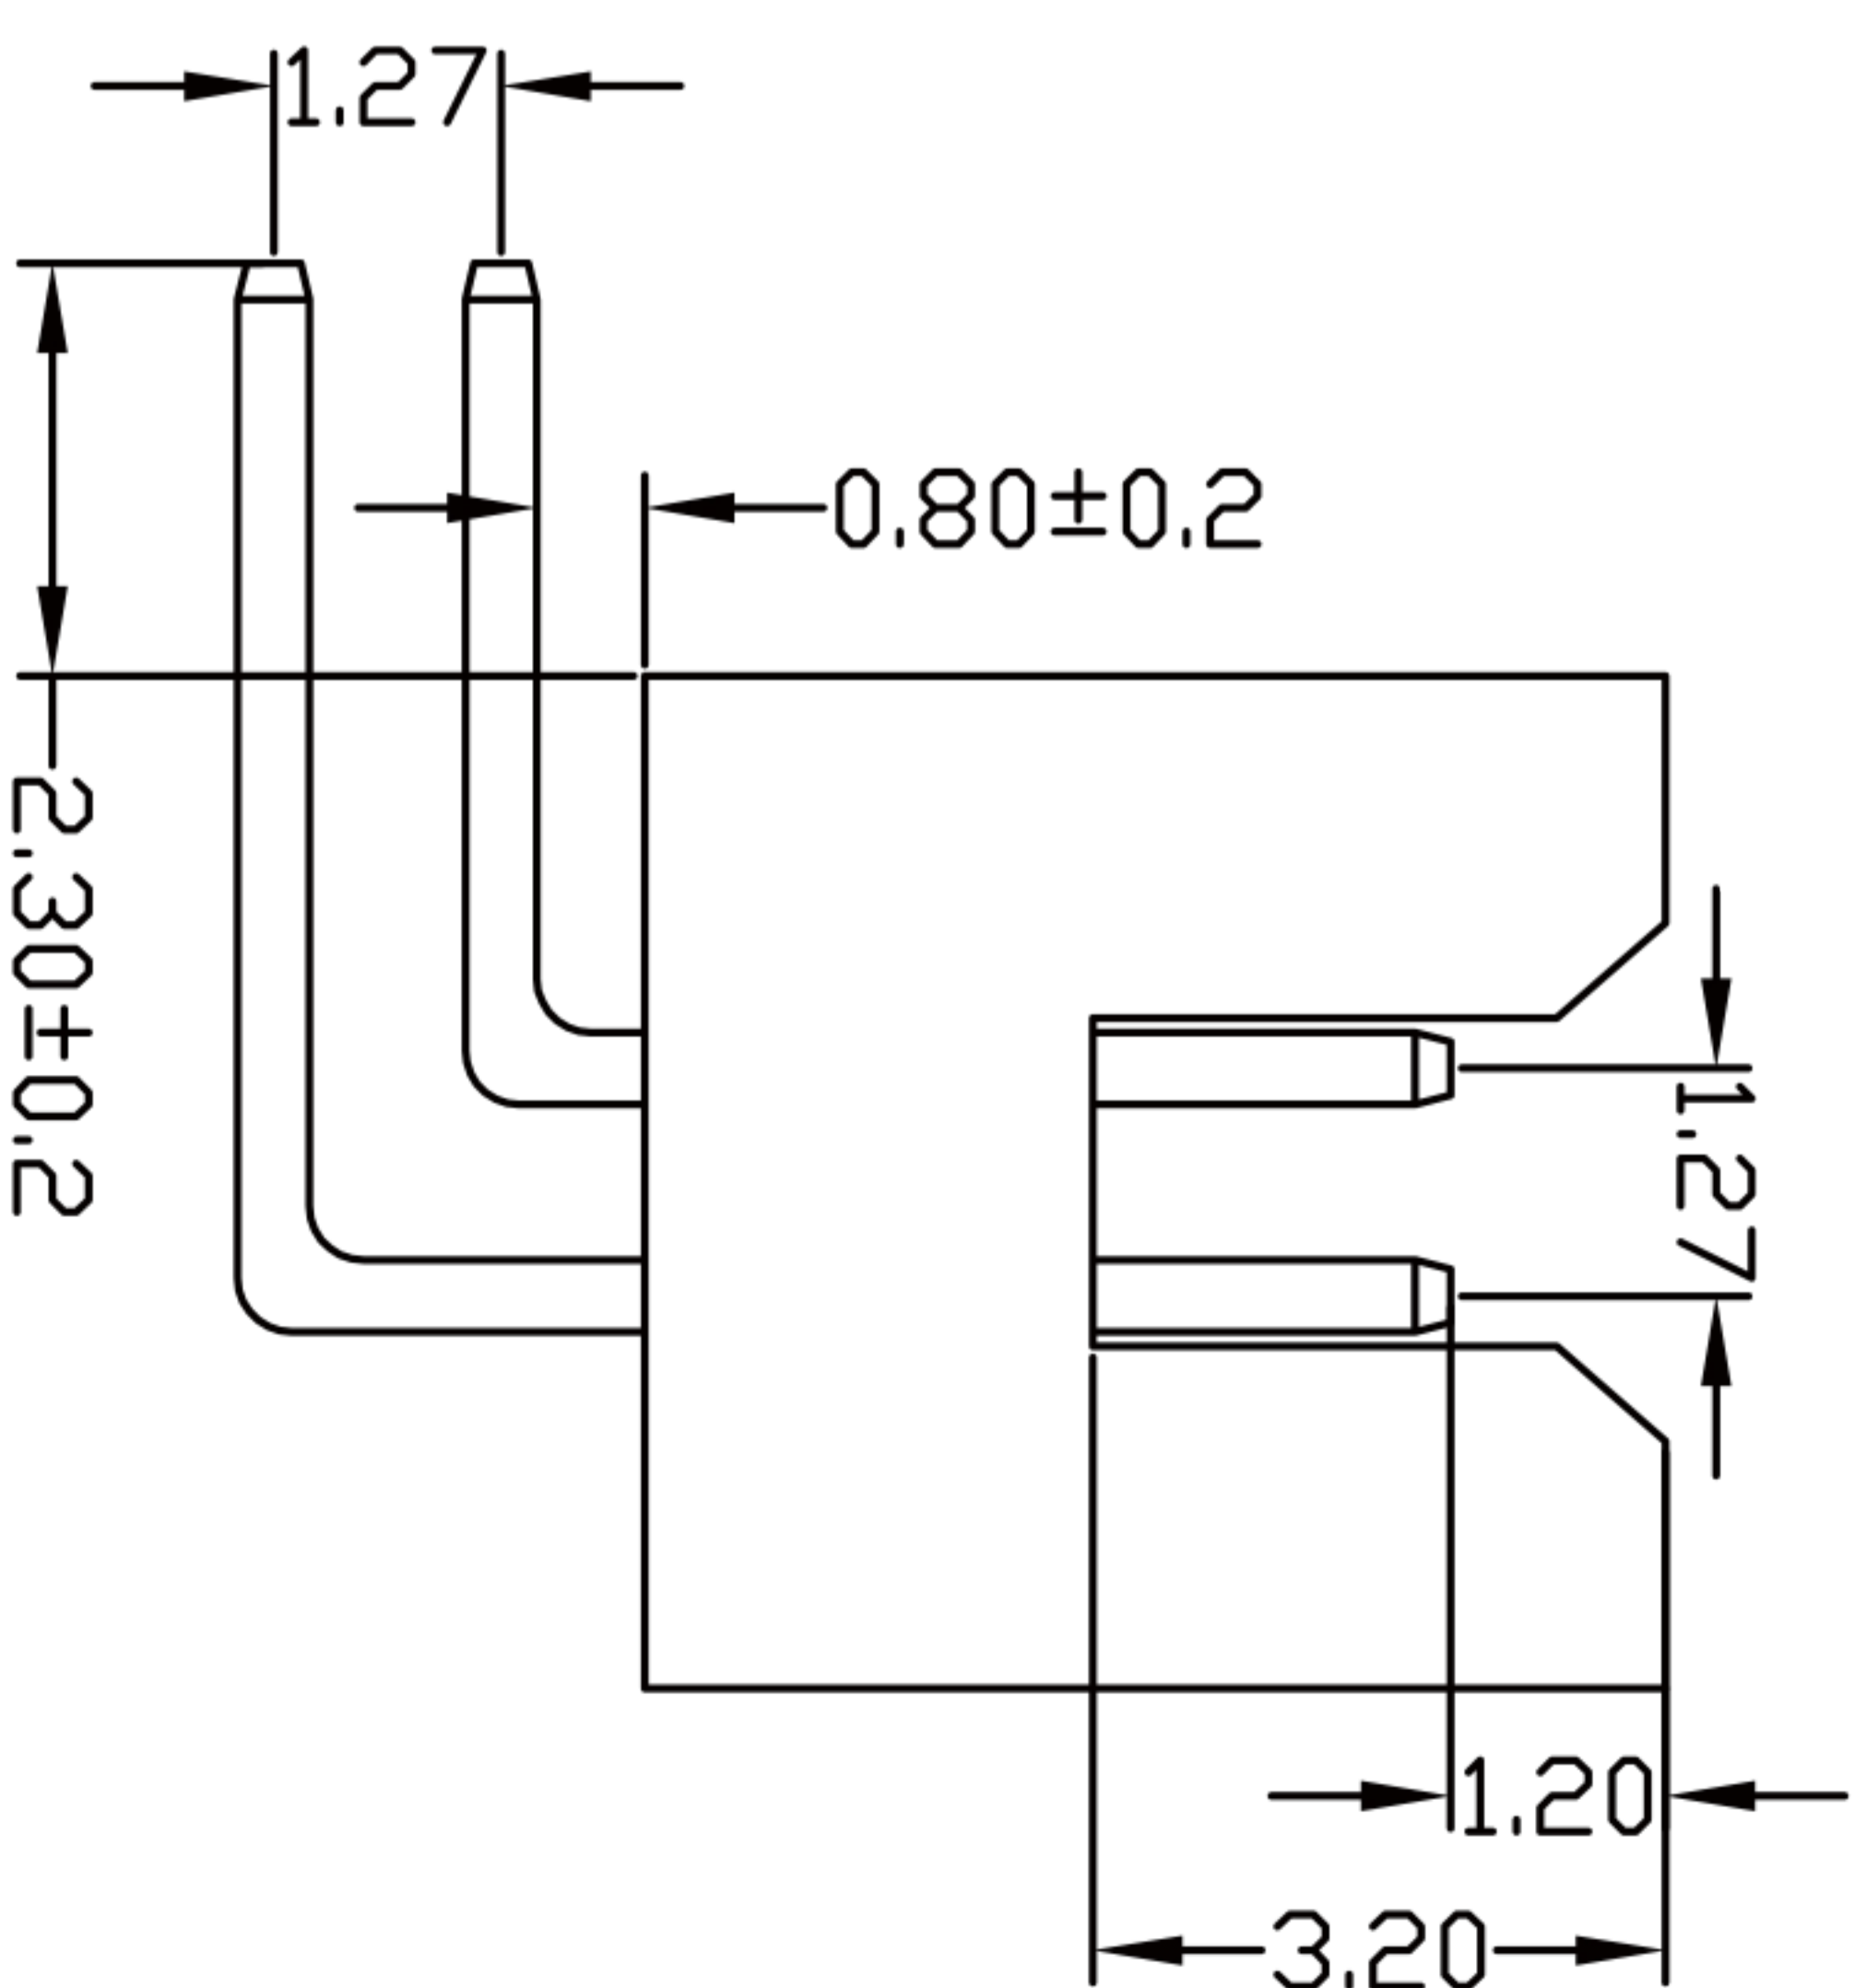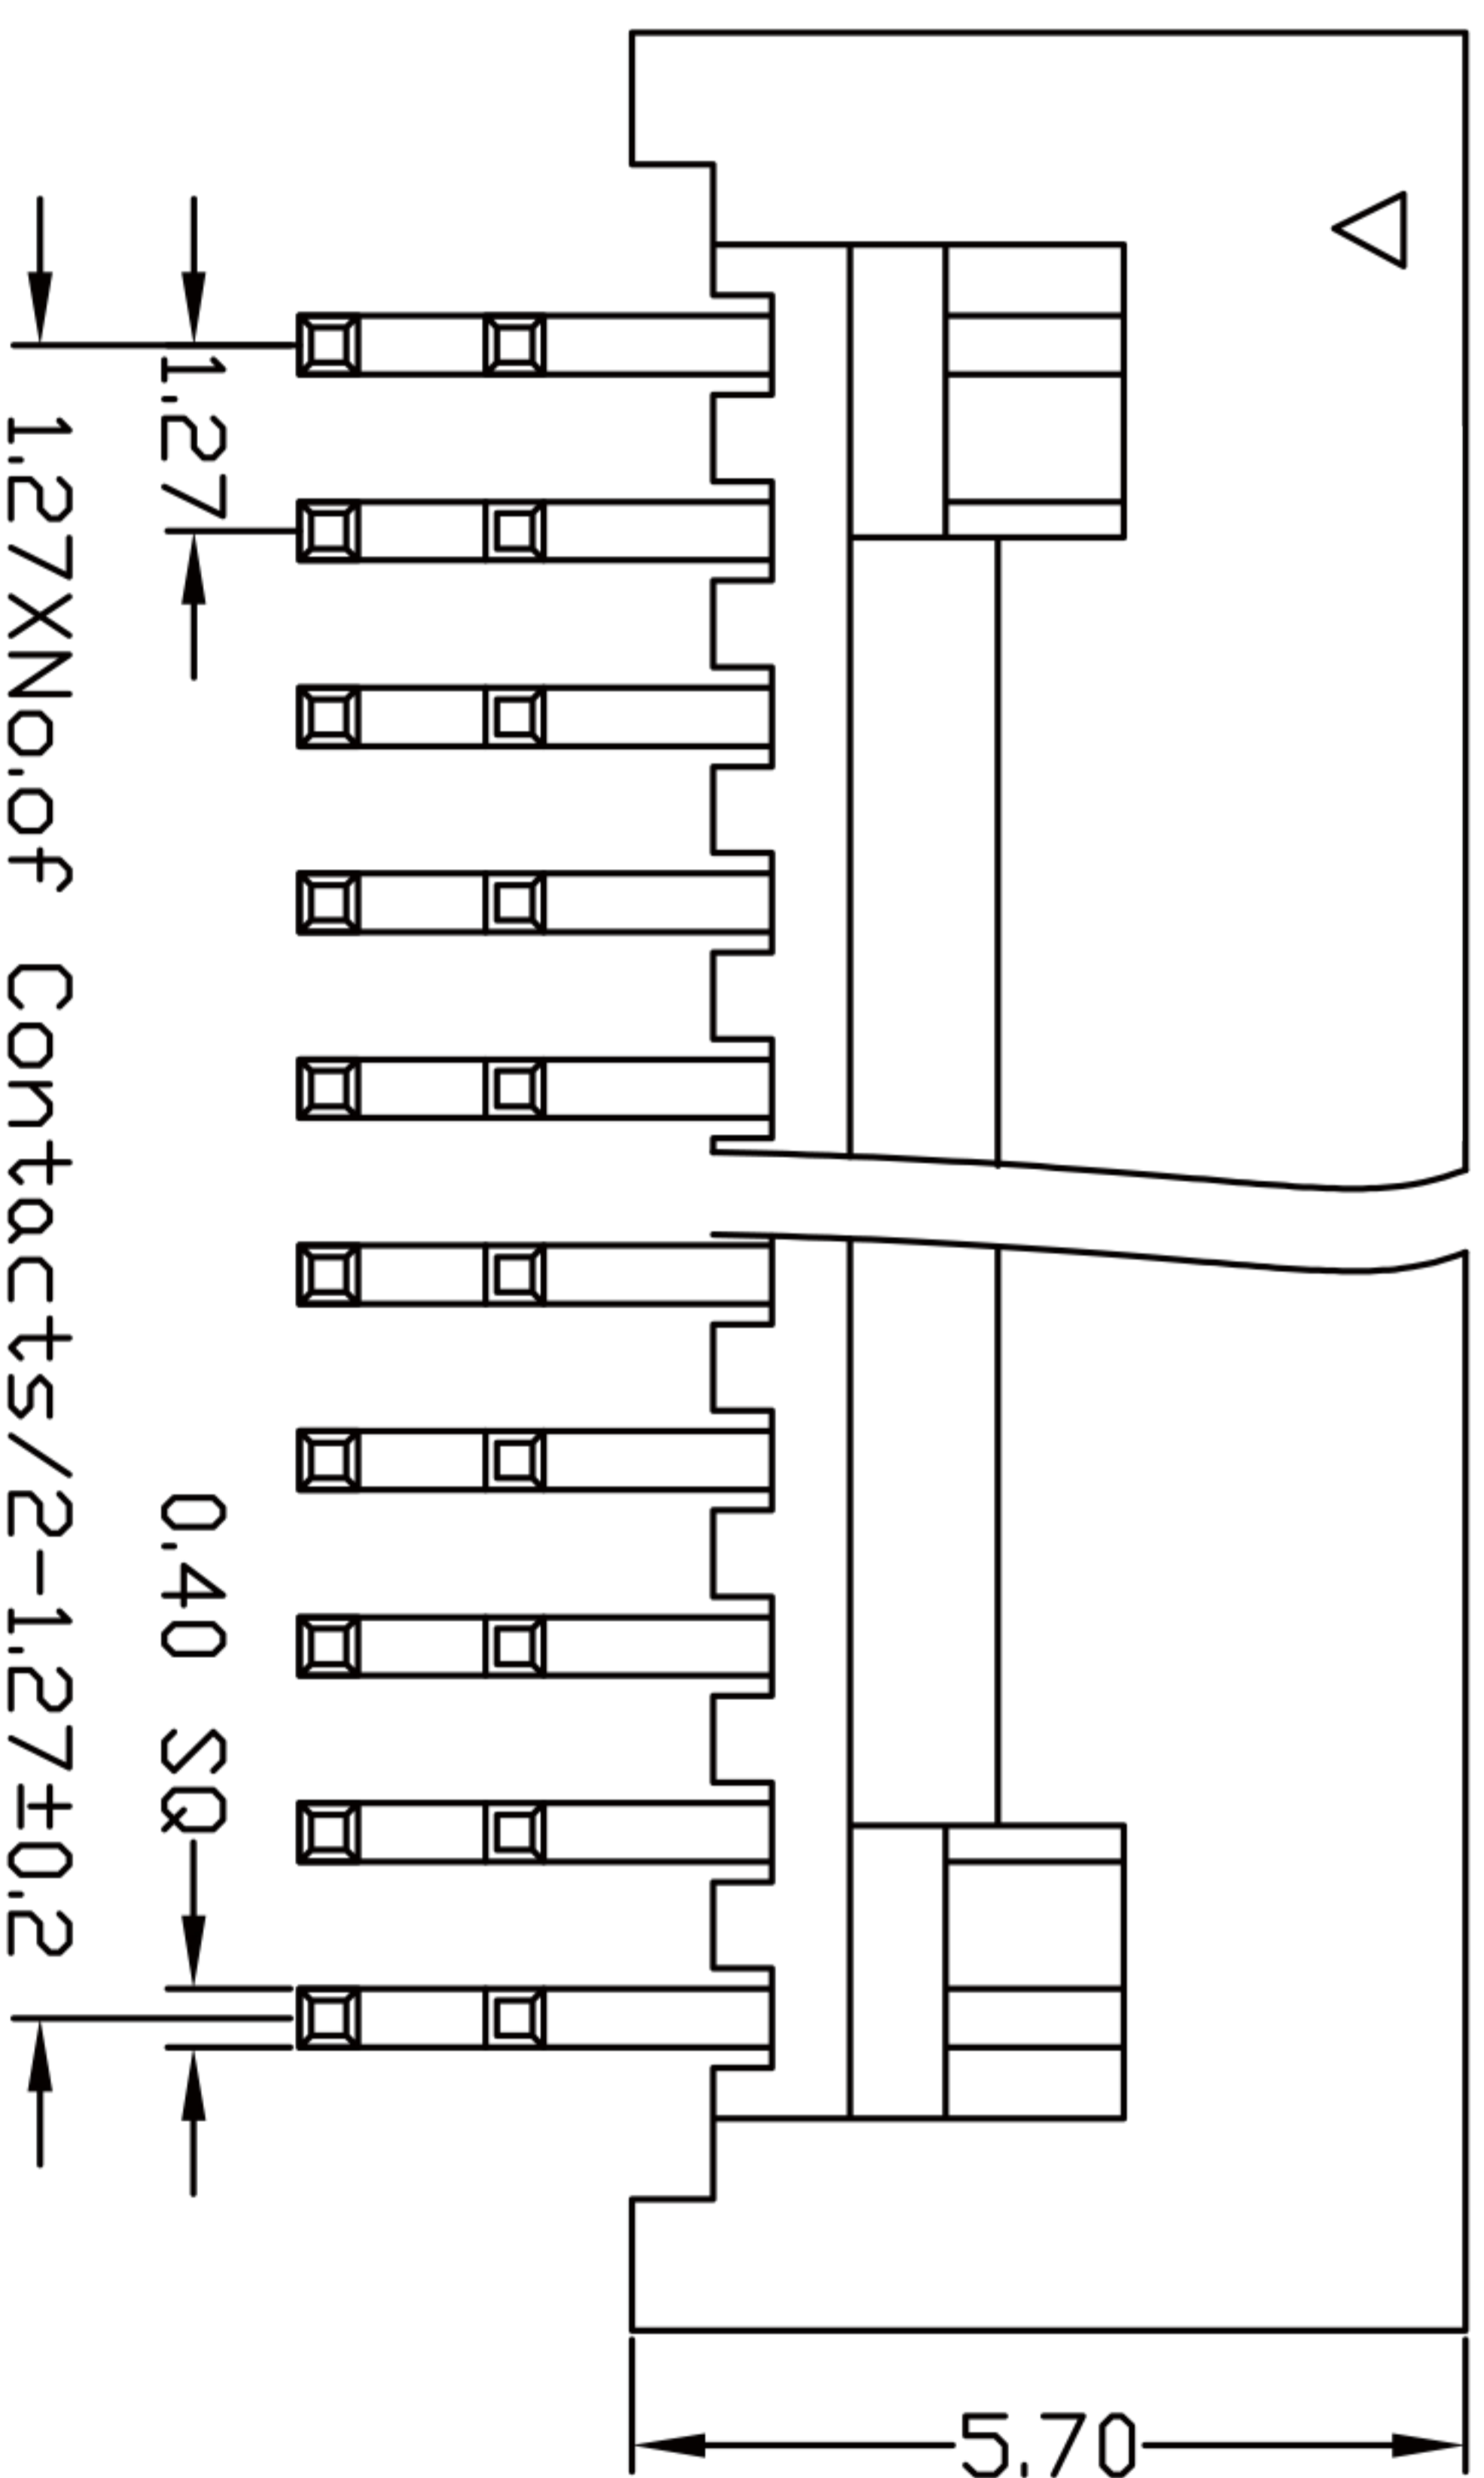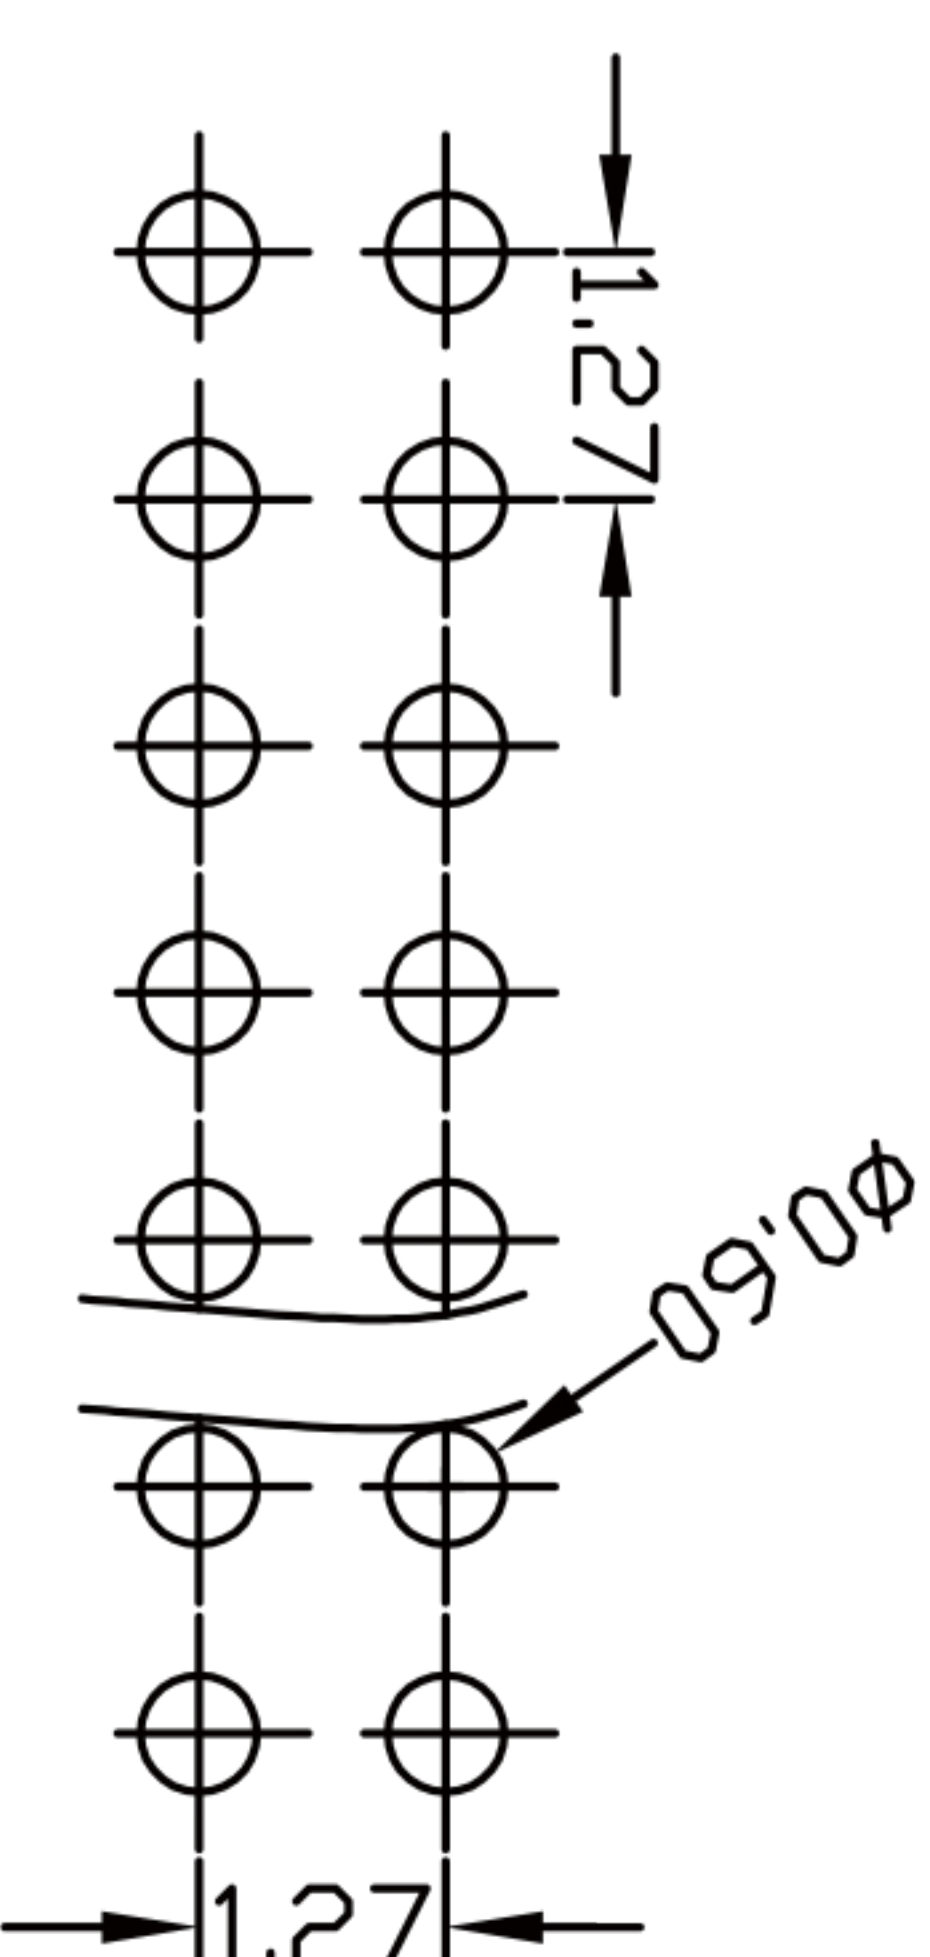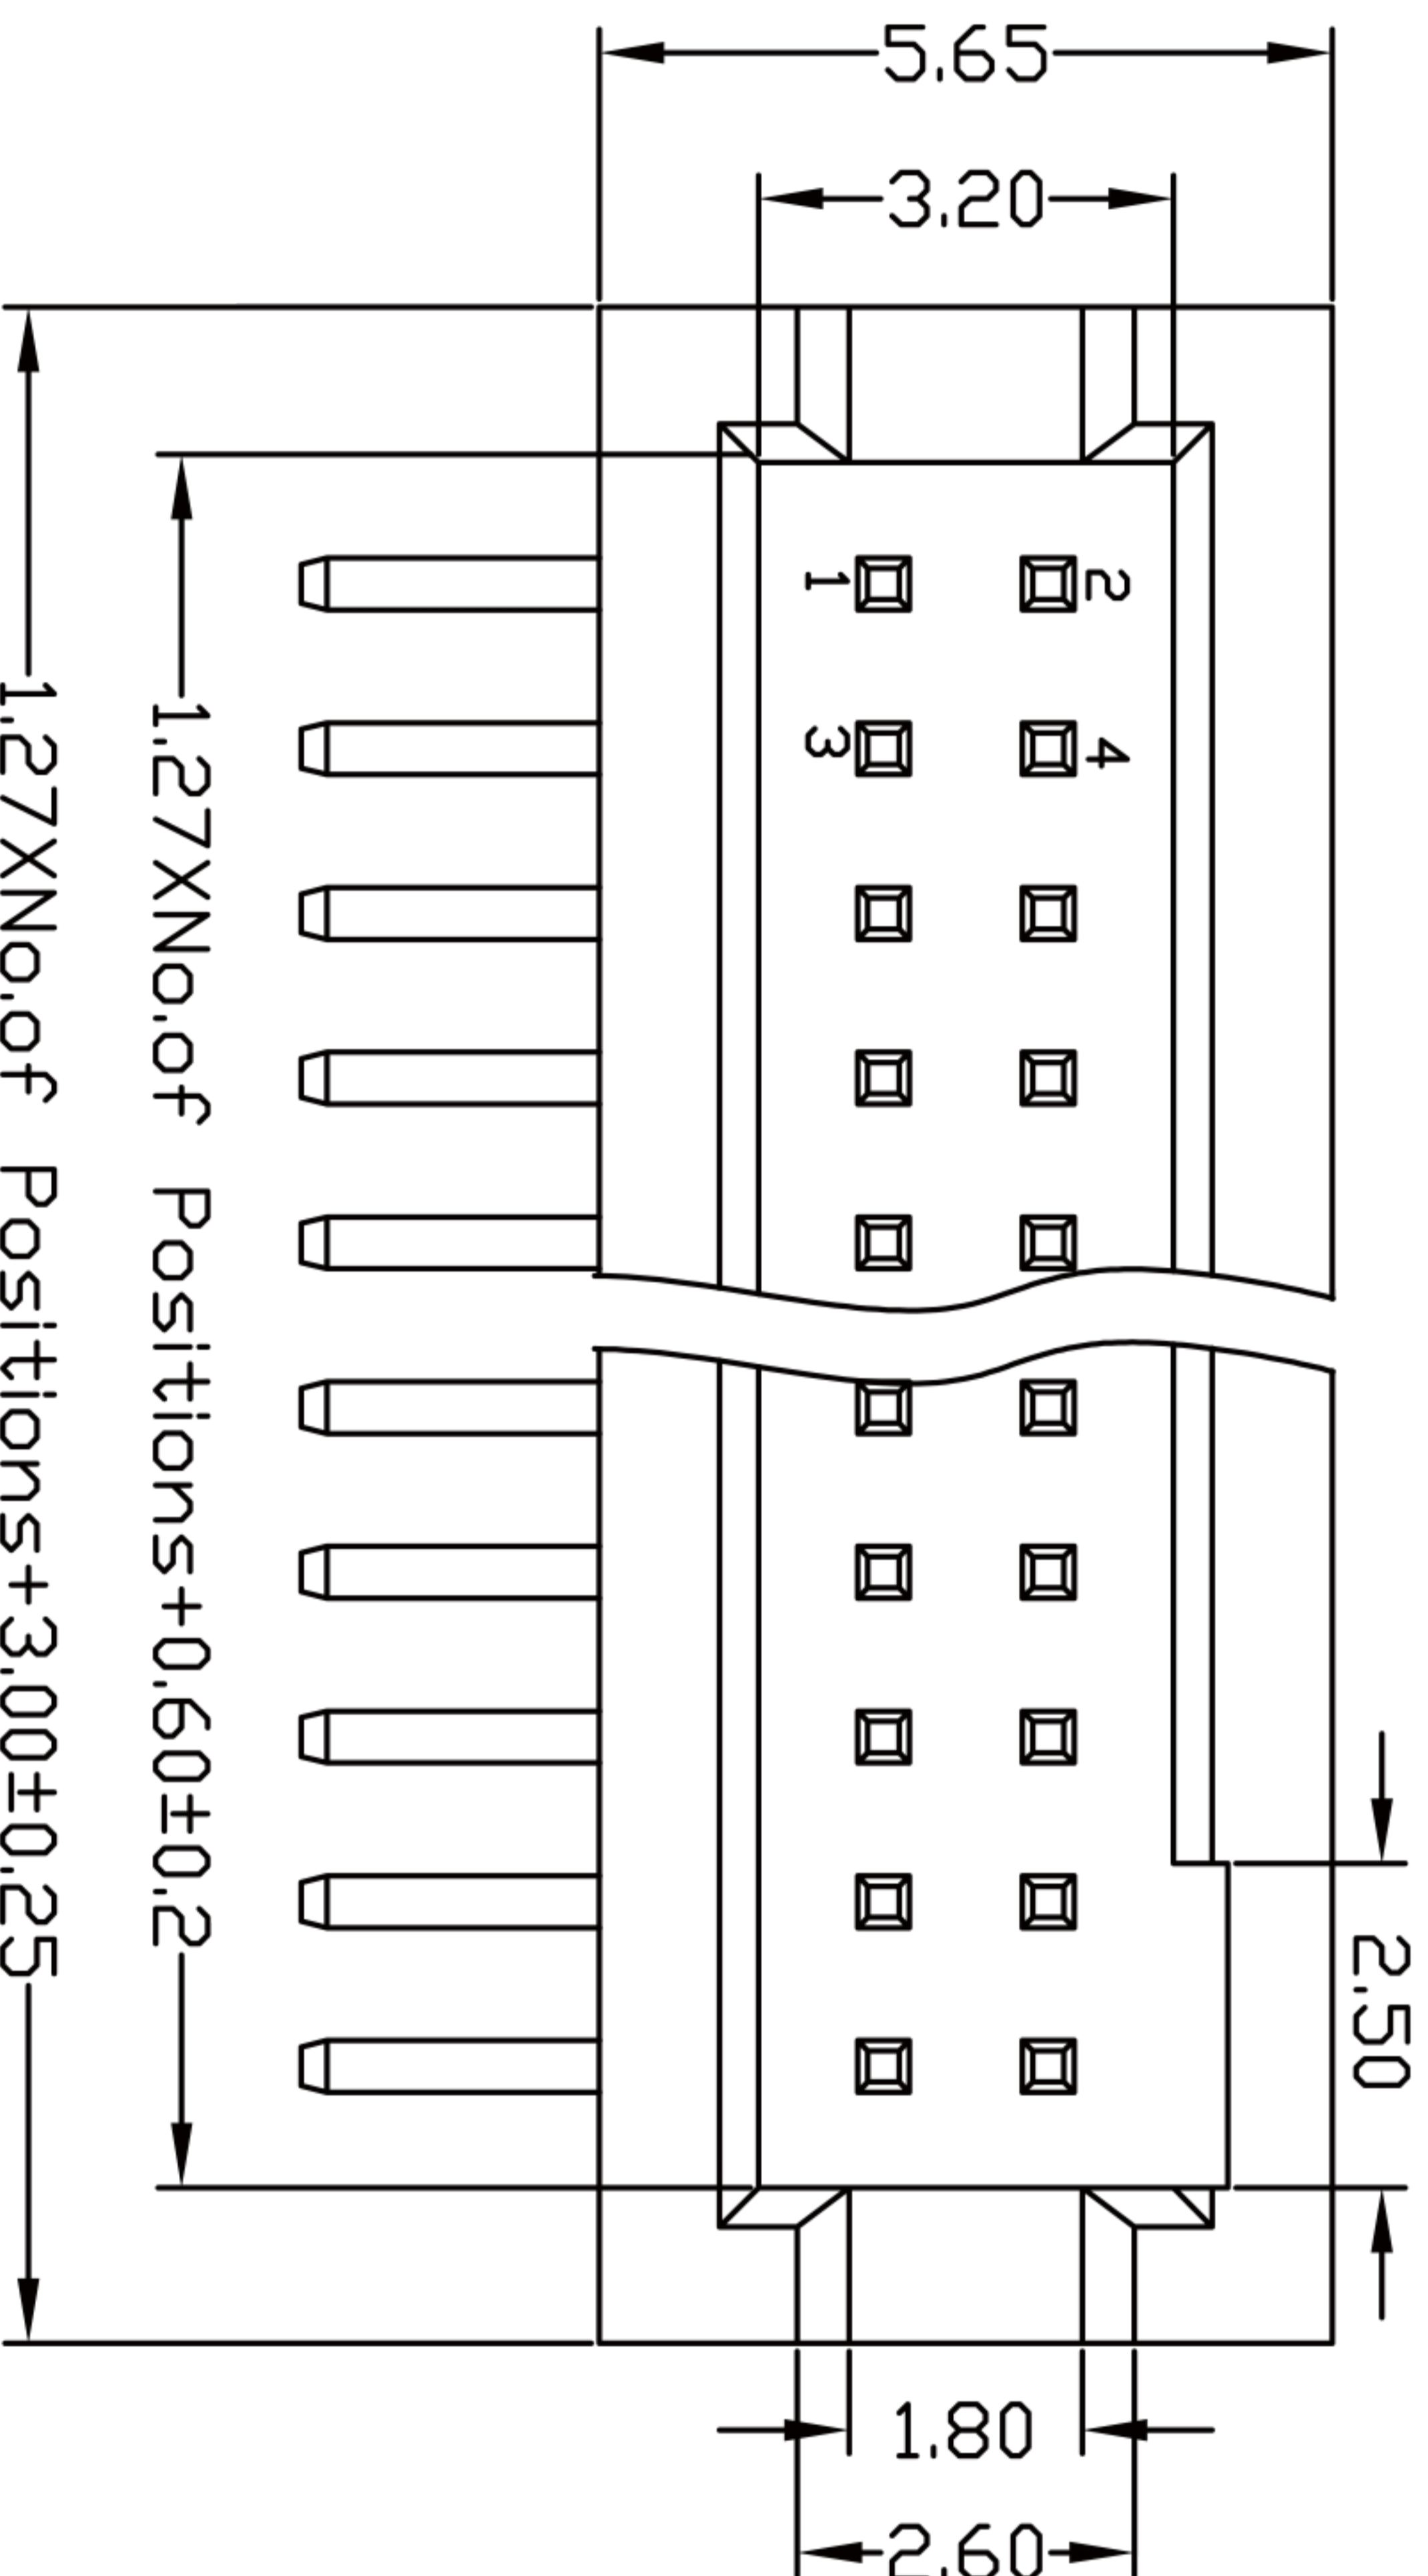

ECN NO.	REV.	DATE.	DESCRIPTION.
	A		NEW

APPROVALS		DATE	TITLE:	
DRAWN	ZHIWEI.CHEN	2015.07.07	1.27mm 筒易牛角 90度	
CHECKED			GP23-1272WR-2XNP	
APPROVALS			SCALE: 1:1	
TOLERANCES ARE		ANGLE	UNIT: mm	PROJ:
30~100	±0.30	±2°		
10~30	±0.20			
5~10	±0.15			
~ 5	±0.10			
DRAWING NO.		DRAWING NO.	SHEET 1 OF 1	



深圳市联丰电子有限公司
 SHENZHEN LINFENG ELECTRONIC CO.,LTD