



SPECIFICATIONS

Contact Resistance: 3 aperes Max  
 Current Rationg: 3m Max  
 Insulator Resistance: 1000 Megohms Max  
 Dielectric Withstanding Voltage:  
 AC 650 Volts RMS at sealeve

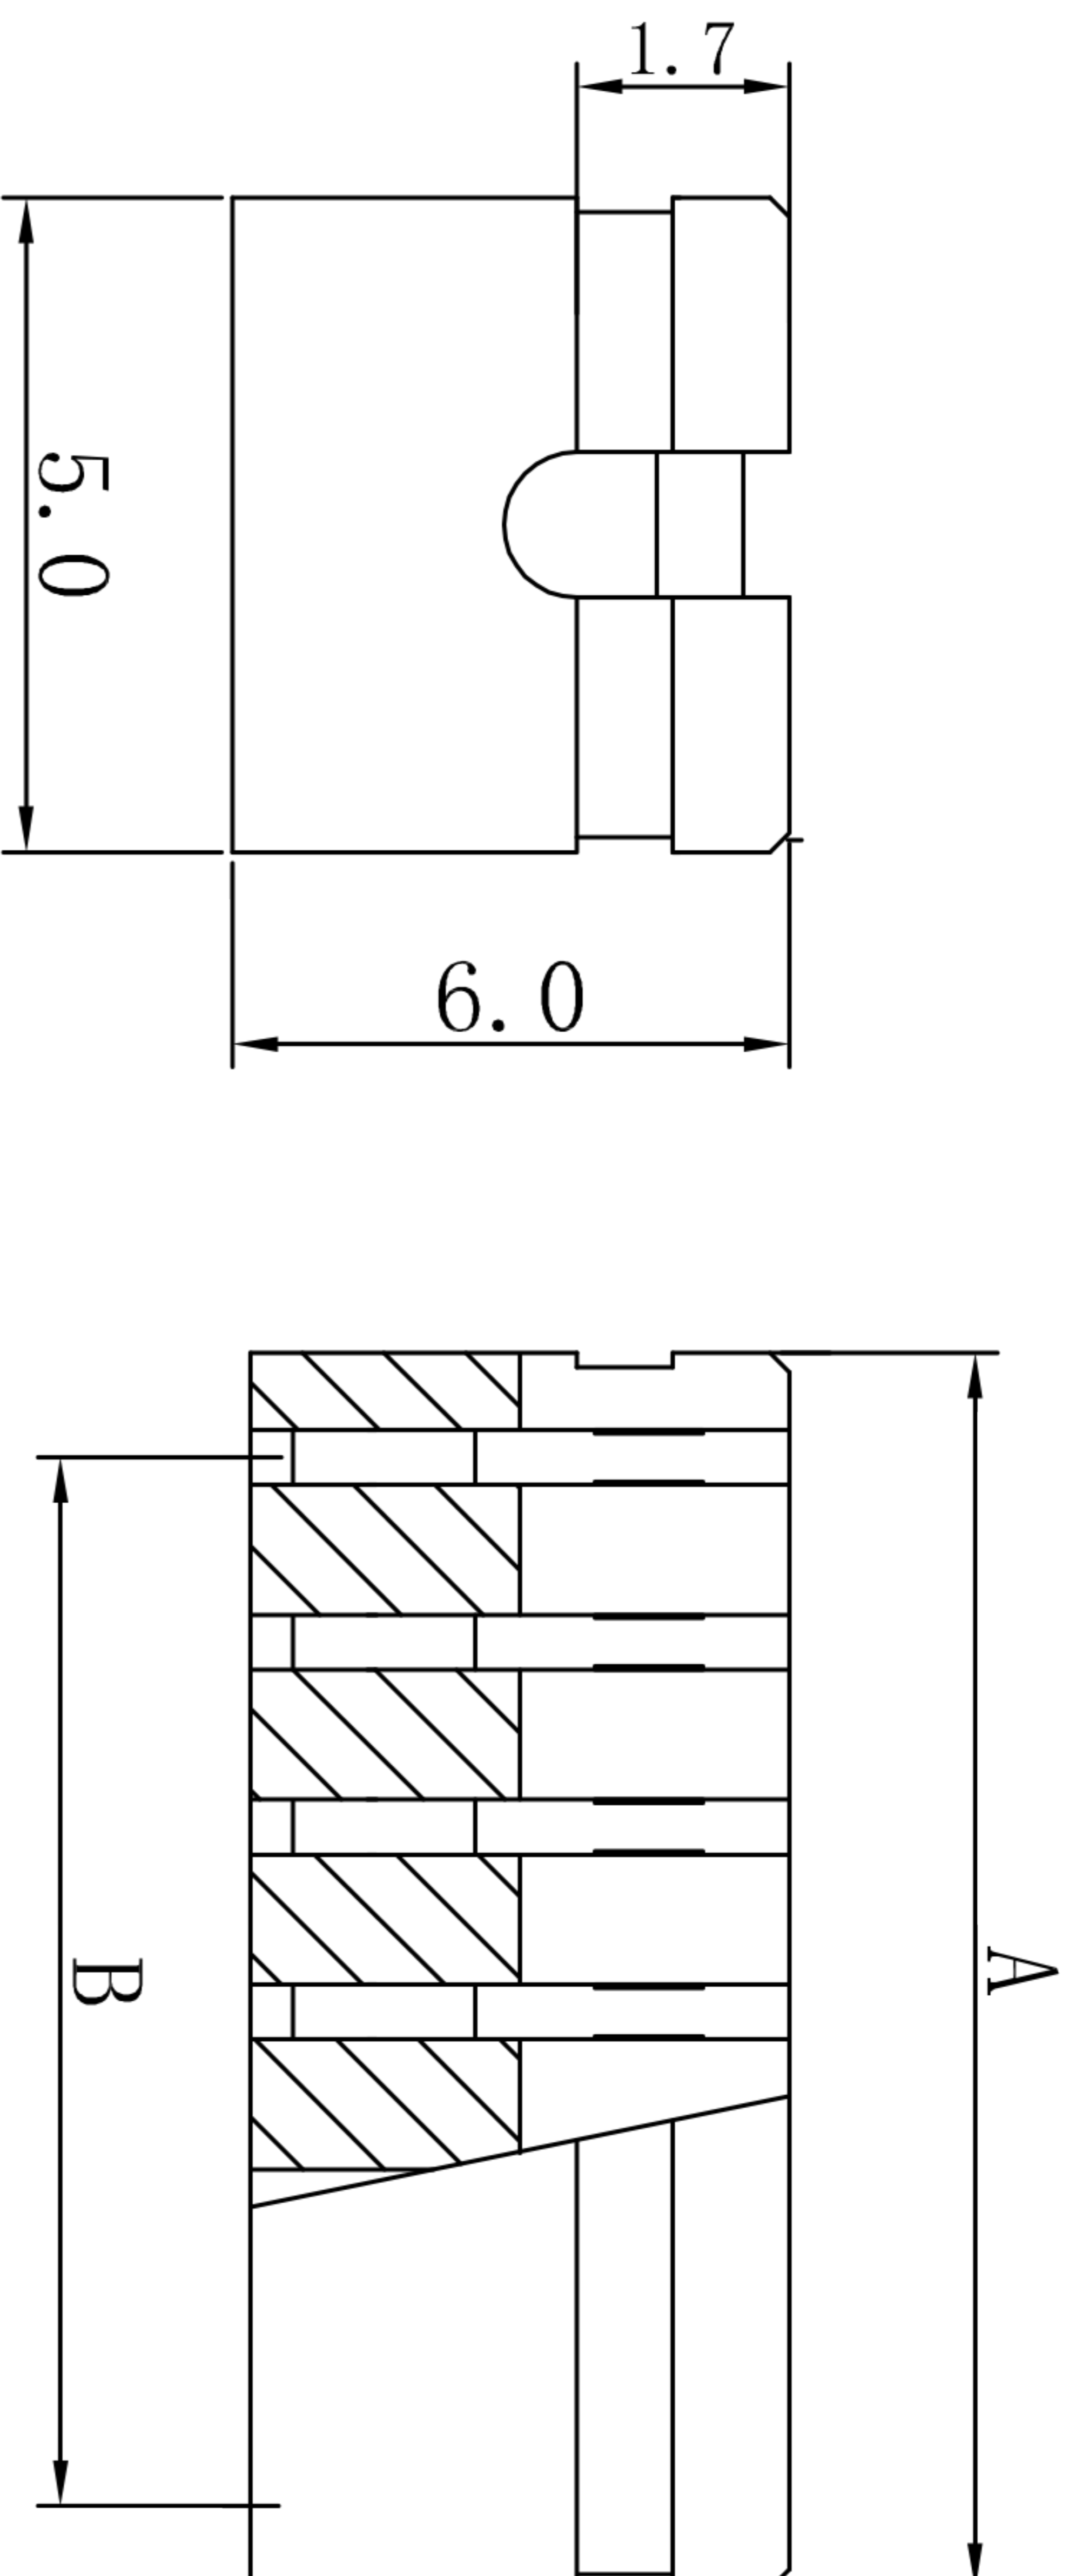

Dimensions list

Contacts Per row	Dimensions	
	A	B
1	2.54	0
2	5.08	2.54
3	7.62	5.08
4	10.16	7.62
5	12.70	10.16
6	15.24	12.70
7	17.78	15.24
8	20.32	17.78
9	22.86	20.32
10	25.40	22.86

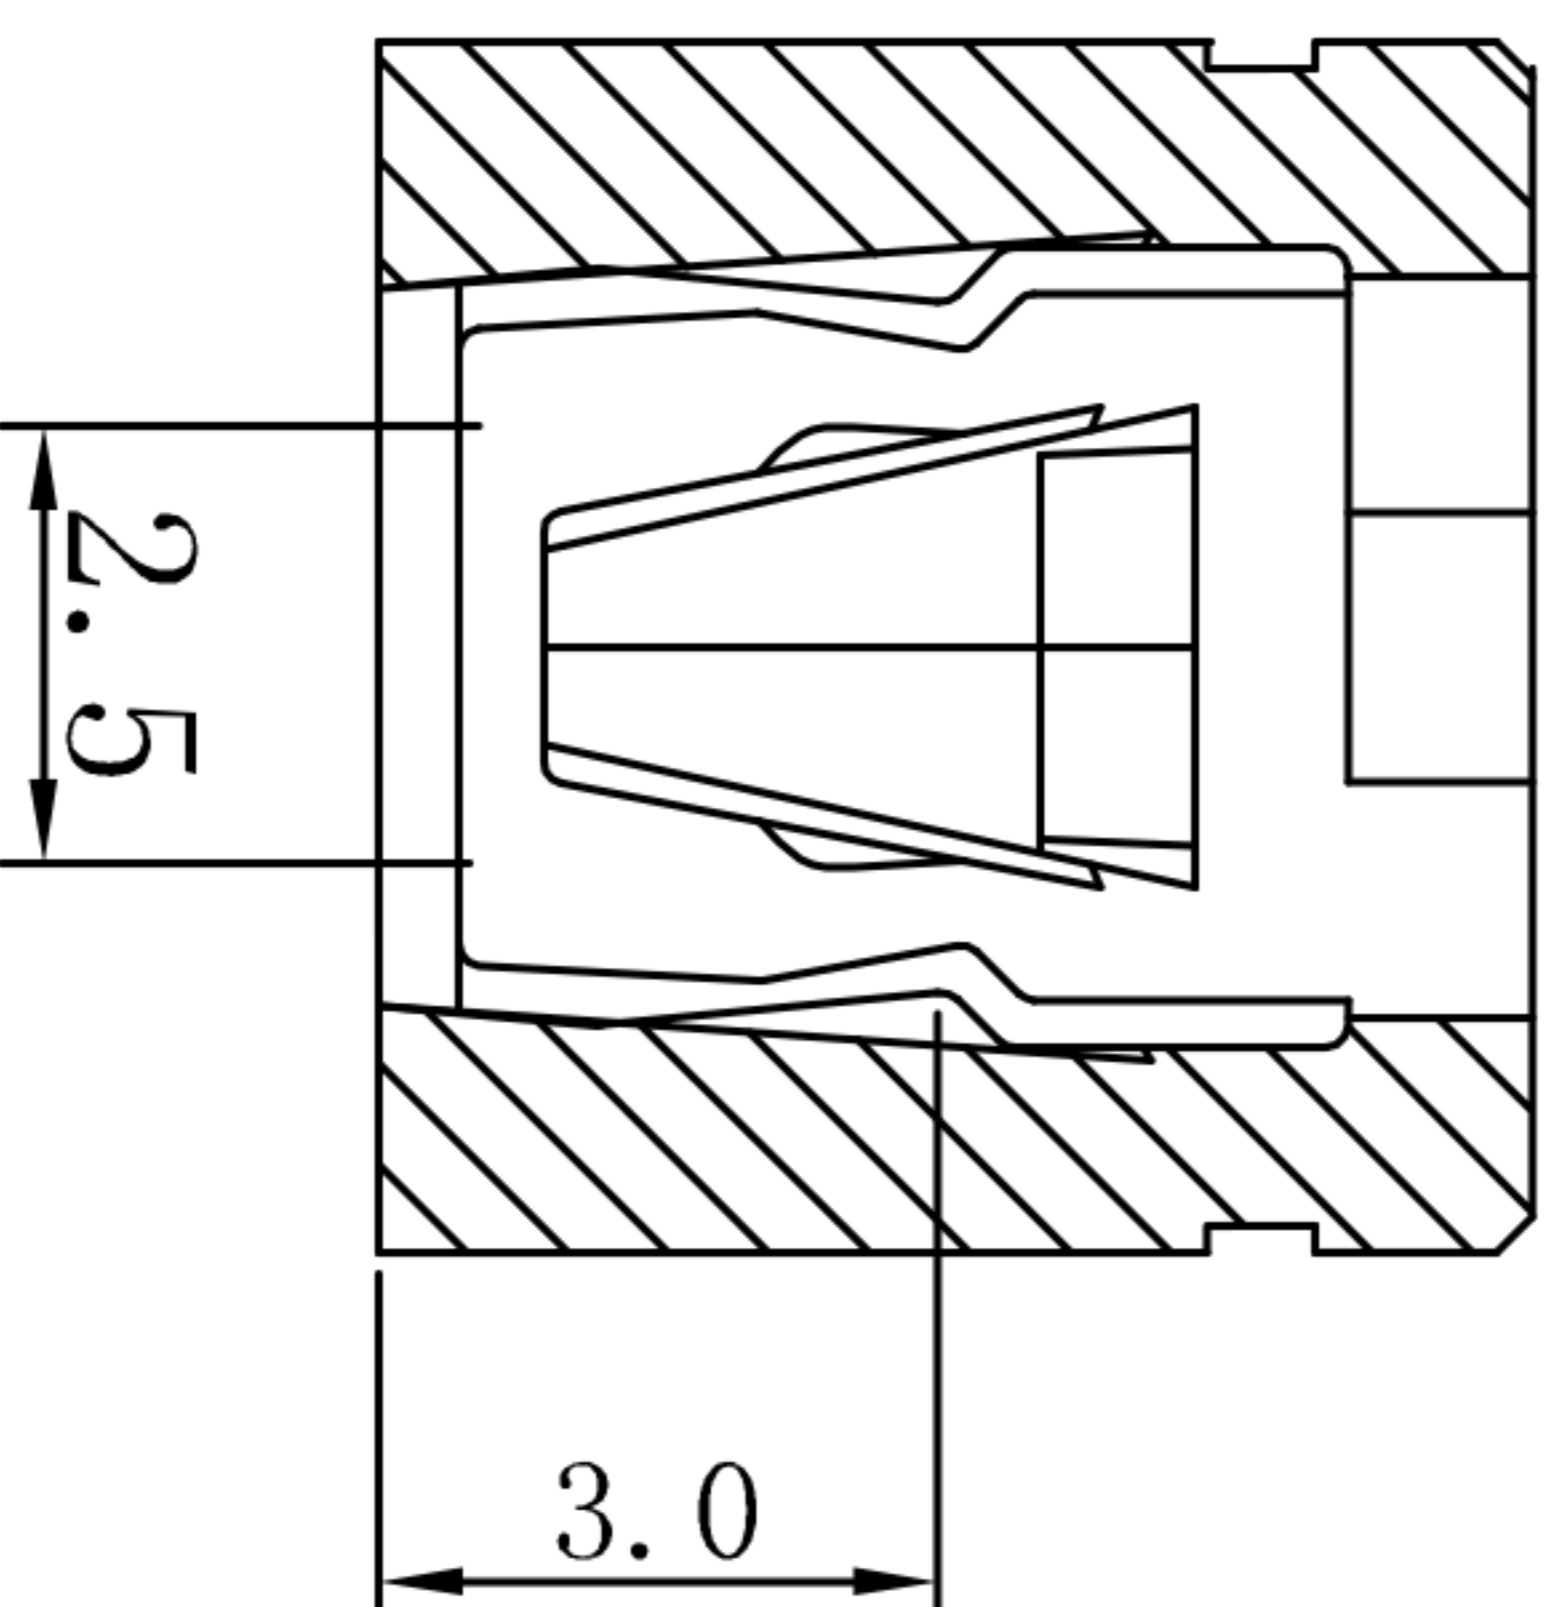

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	深圳市联丰电子有限公司 SHENZHEN LINFENG ELECTRONIC CO.,LTD			
DRAWN	ZHIWEI.CHEN	2015.07.07				
CHECKED			TITLE:	MINI JUMPERPITCH2.54mm		
APPROVALS			PART NO.	GP25-2522WV-NP-M		
TOLERANCES ARE			UNIT: mm	SCALE: 1:1	PROJ:	
30~以上	±0.30	ANGLE	DRAWING NO.		SHEET 1 OF 1	
10~30	±0.20					
5~10	±0.15	±2'				
~ 5	±0.10					