ROHS

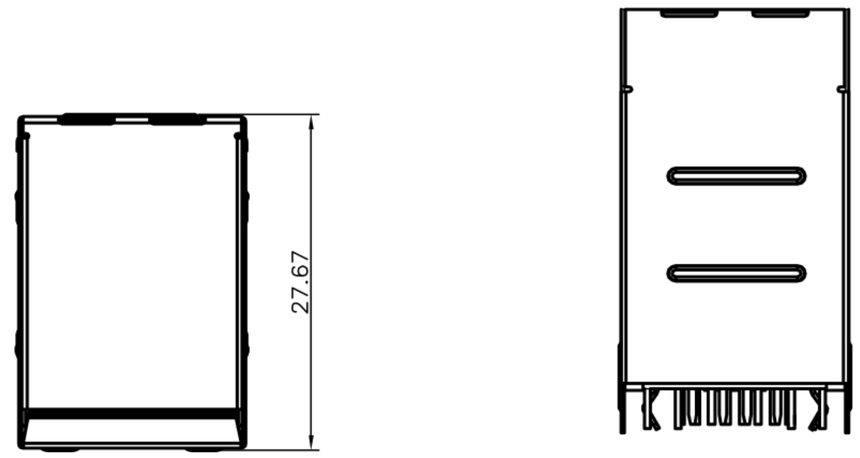

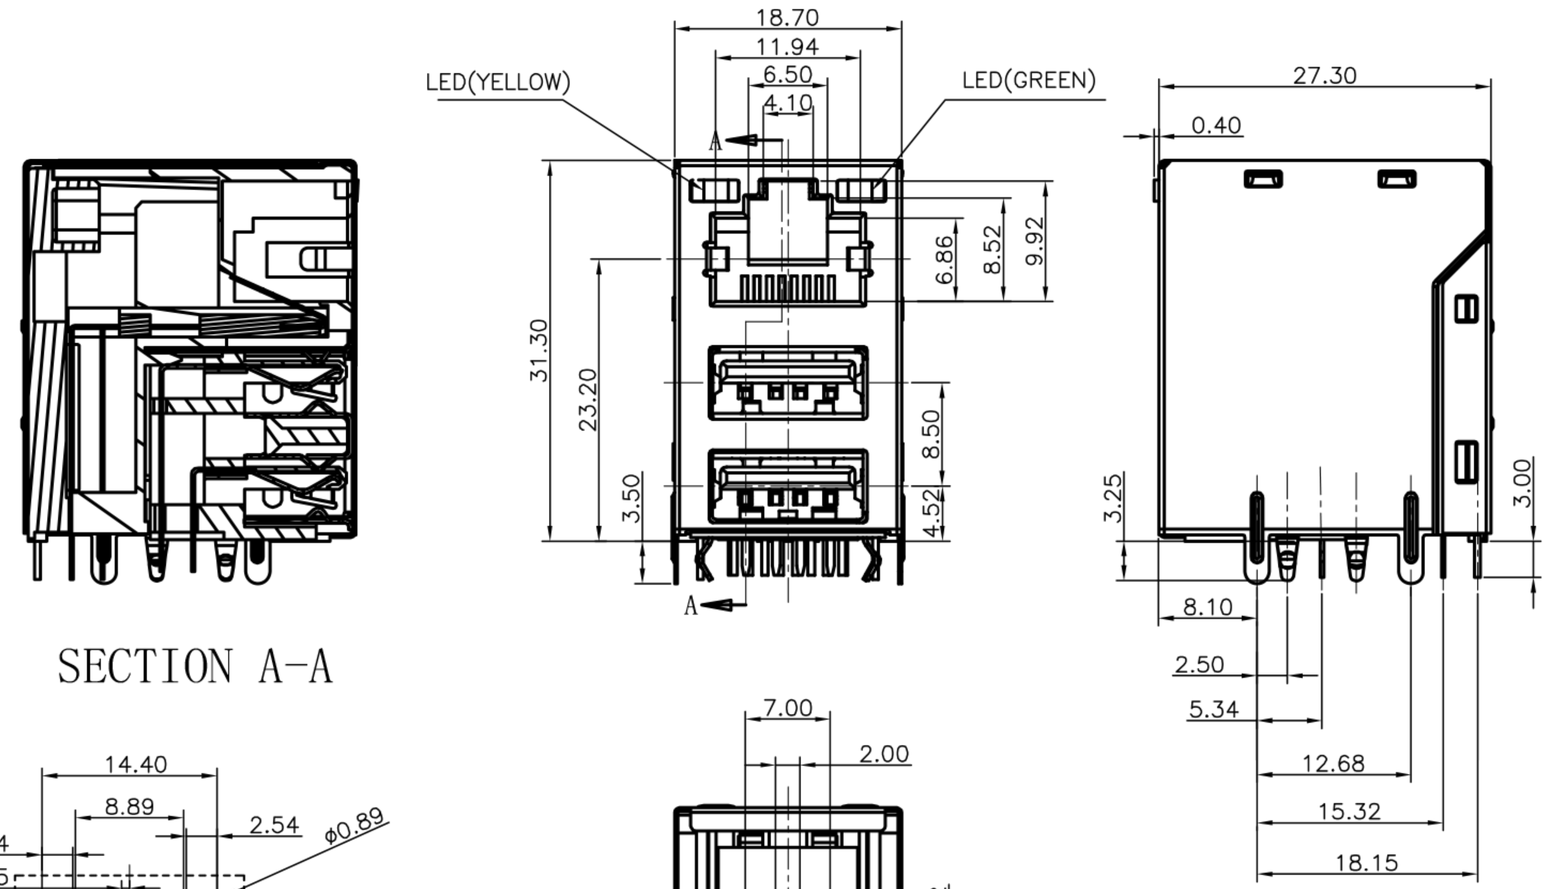

SECTION A-A

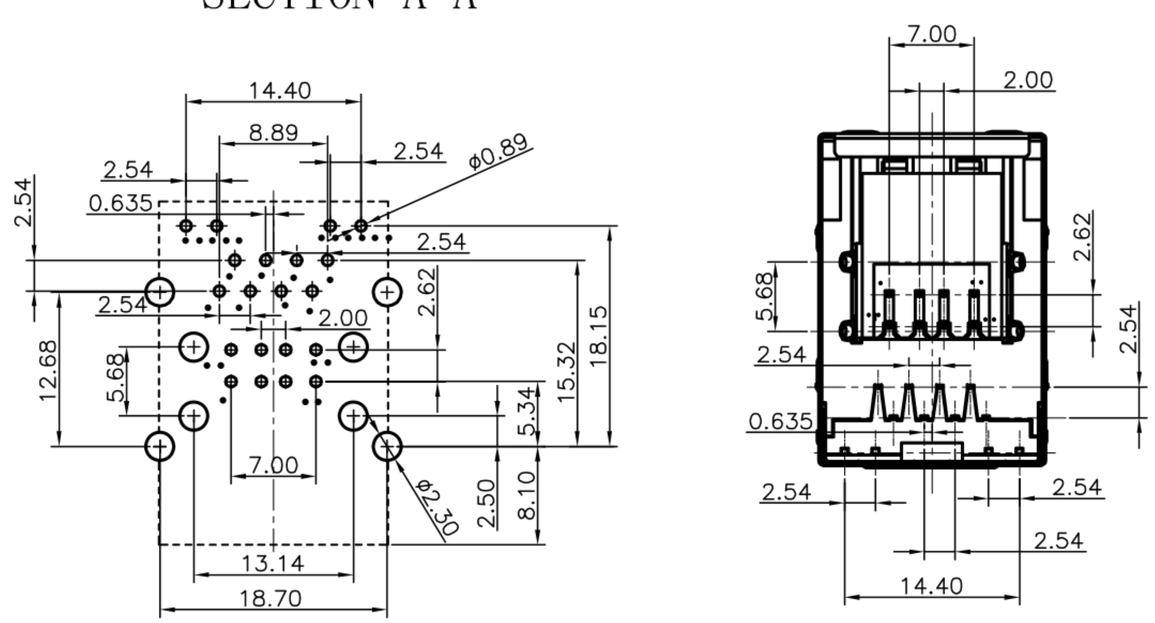

PCB LAYOUT

Material
Contact:
RJ Contact :T=0.25mm
Phosphor Bronze Gold FU"
USB Contact:T=0.25mm C2680-H
Gold FU"
Plating Over Nickel
Shielded:
Front shell:SPCC T=0.25mm
Back shell:SPCC T=0.25mm
HOUSING: PBT + 30%G.F., BLACK,
UL94V-0

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
———	A	———	NEW	———	———	———

APPROVALS		DATE
DRAWN	ZHIWEI.CHEN	2015.07.07
CHECKED		
APPROVALS		

TOLERANCES ARE			ANGLE
	30~以上	±0.30	
	10~30	±0.20	
	5~10	±0.15	±2°
	~ 5	±0.10	

深圳市联丰盈电子有限公司
SHENZHEN LINFENYING ELECTRONIC CO.,LTD

TITLE:	●●●●●●●●●●●●●●●●		
PART NO.	RJ45-6W11-DDYG-AB-88-U2		
UNIT: mm	SCALE: 1:1	PROJ:	
DRAWING NO.	———	SHEET 1 OF 1	