


- SPECIFICATIONS:**
1. Voltage: 125V AC RMS
  2. Current Rating: 1.5A
  3. Contact Resistance: 40mΩ MAX.
  4. Insulation Resistance: 500MΩ MIN.
  5. Dielectric Withstand Voltage : 500V DC
  6. Operate Temperature: -40°C~80°C
  7. Durability: 500 Mating Cycles MIN.

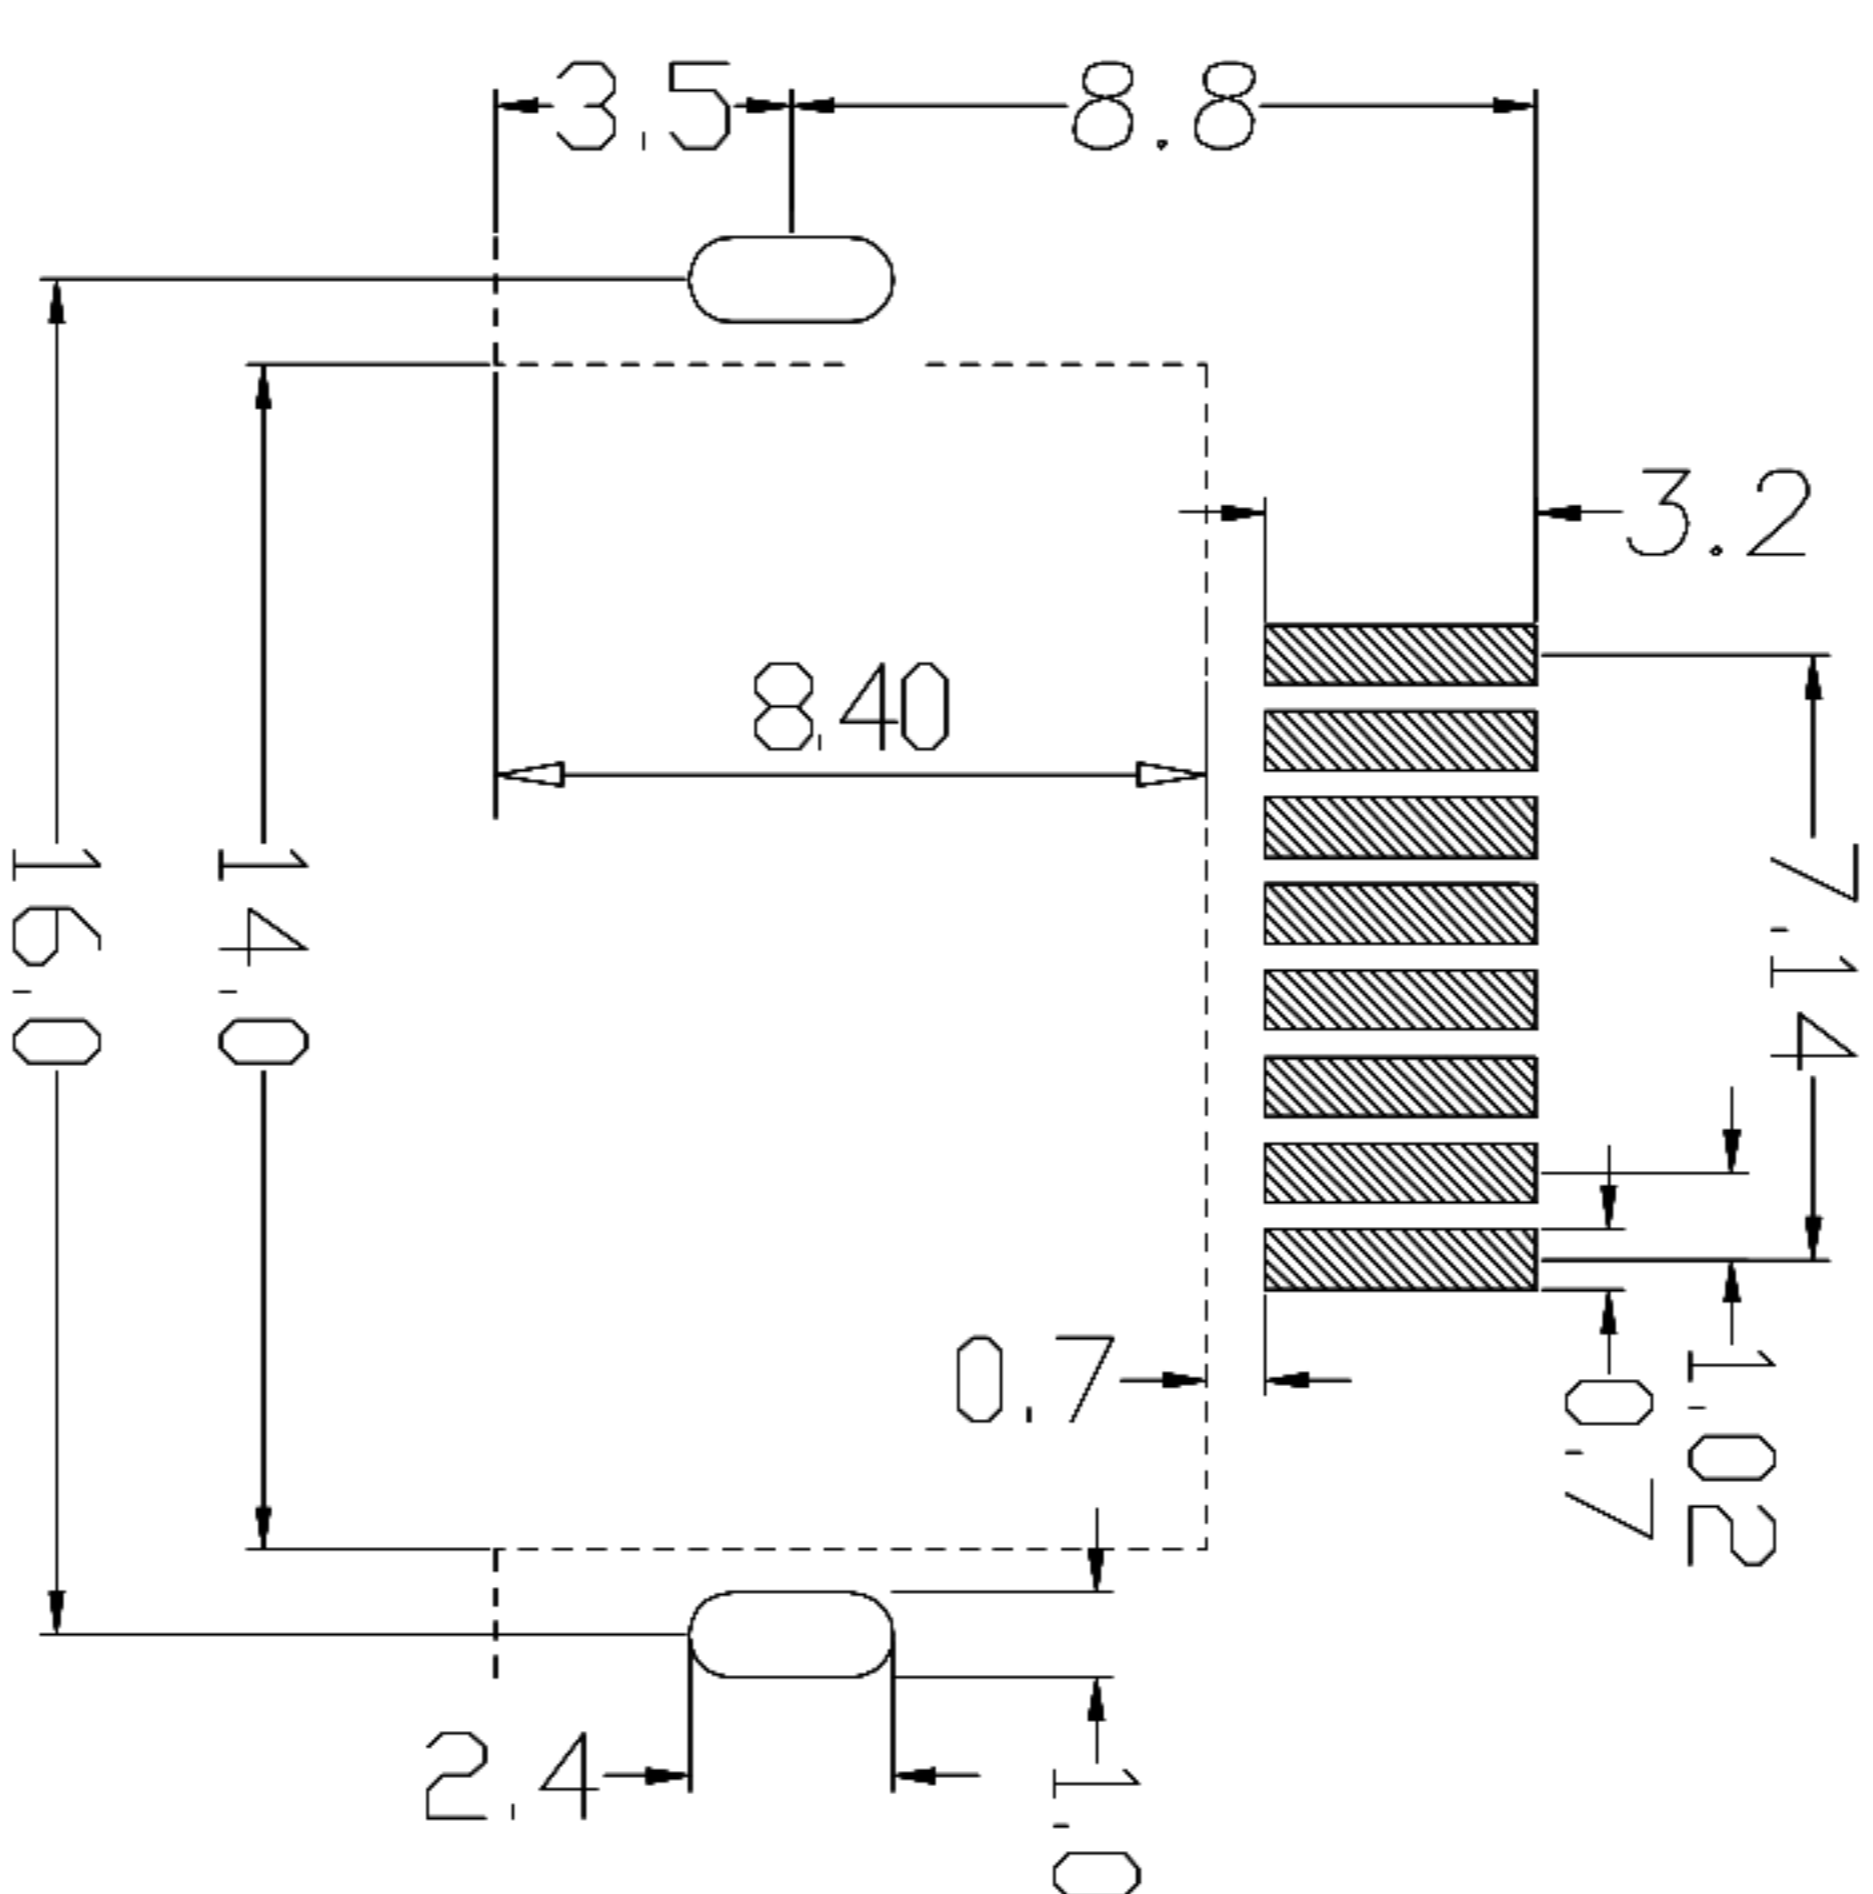

**RECOMMENDED PCB LAYOUT (TOP VIEW)**  
(ALL TOLERANCES ARE ±0.05)

3	Shielding	1	Brass	Ni Plating	
2	Terminal	8	Phosphor Bronze	PLATING & COLOR	
1	Housing	1	LCP+15% G.F UL94V-0	BLACK	
NO.	PART NAME	Q'TY	MATERIAL	Material & Plating	Remark

APPROVALS		DATE	<p><b>深圳市联丰电子有限公司</b> SHENZHEN LINFENG ELECTRONIC CO.,LTD</p>
DRAWN	ZHILWEI,CHEN	2015.07.07	
CHECKED			

TOLERANCES	30~45L	±0.30	ANGLE	PART NO.	RJ45-6W11-CSN-AB-88-B1
	45~50	±0.20		UNIT: mm	SCALE: 1:1
	5~10	±0.15	±2°	DRAWING NO.	PRD-J-1

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			