
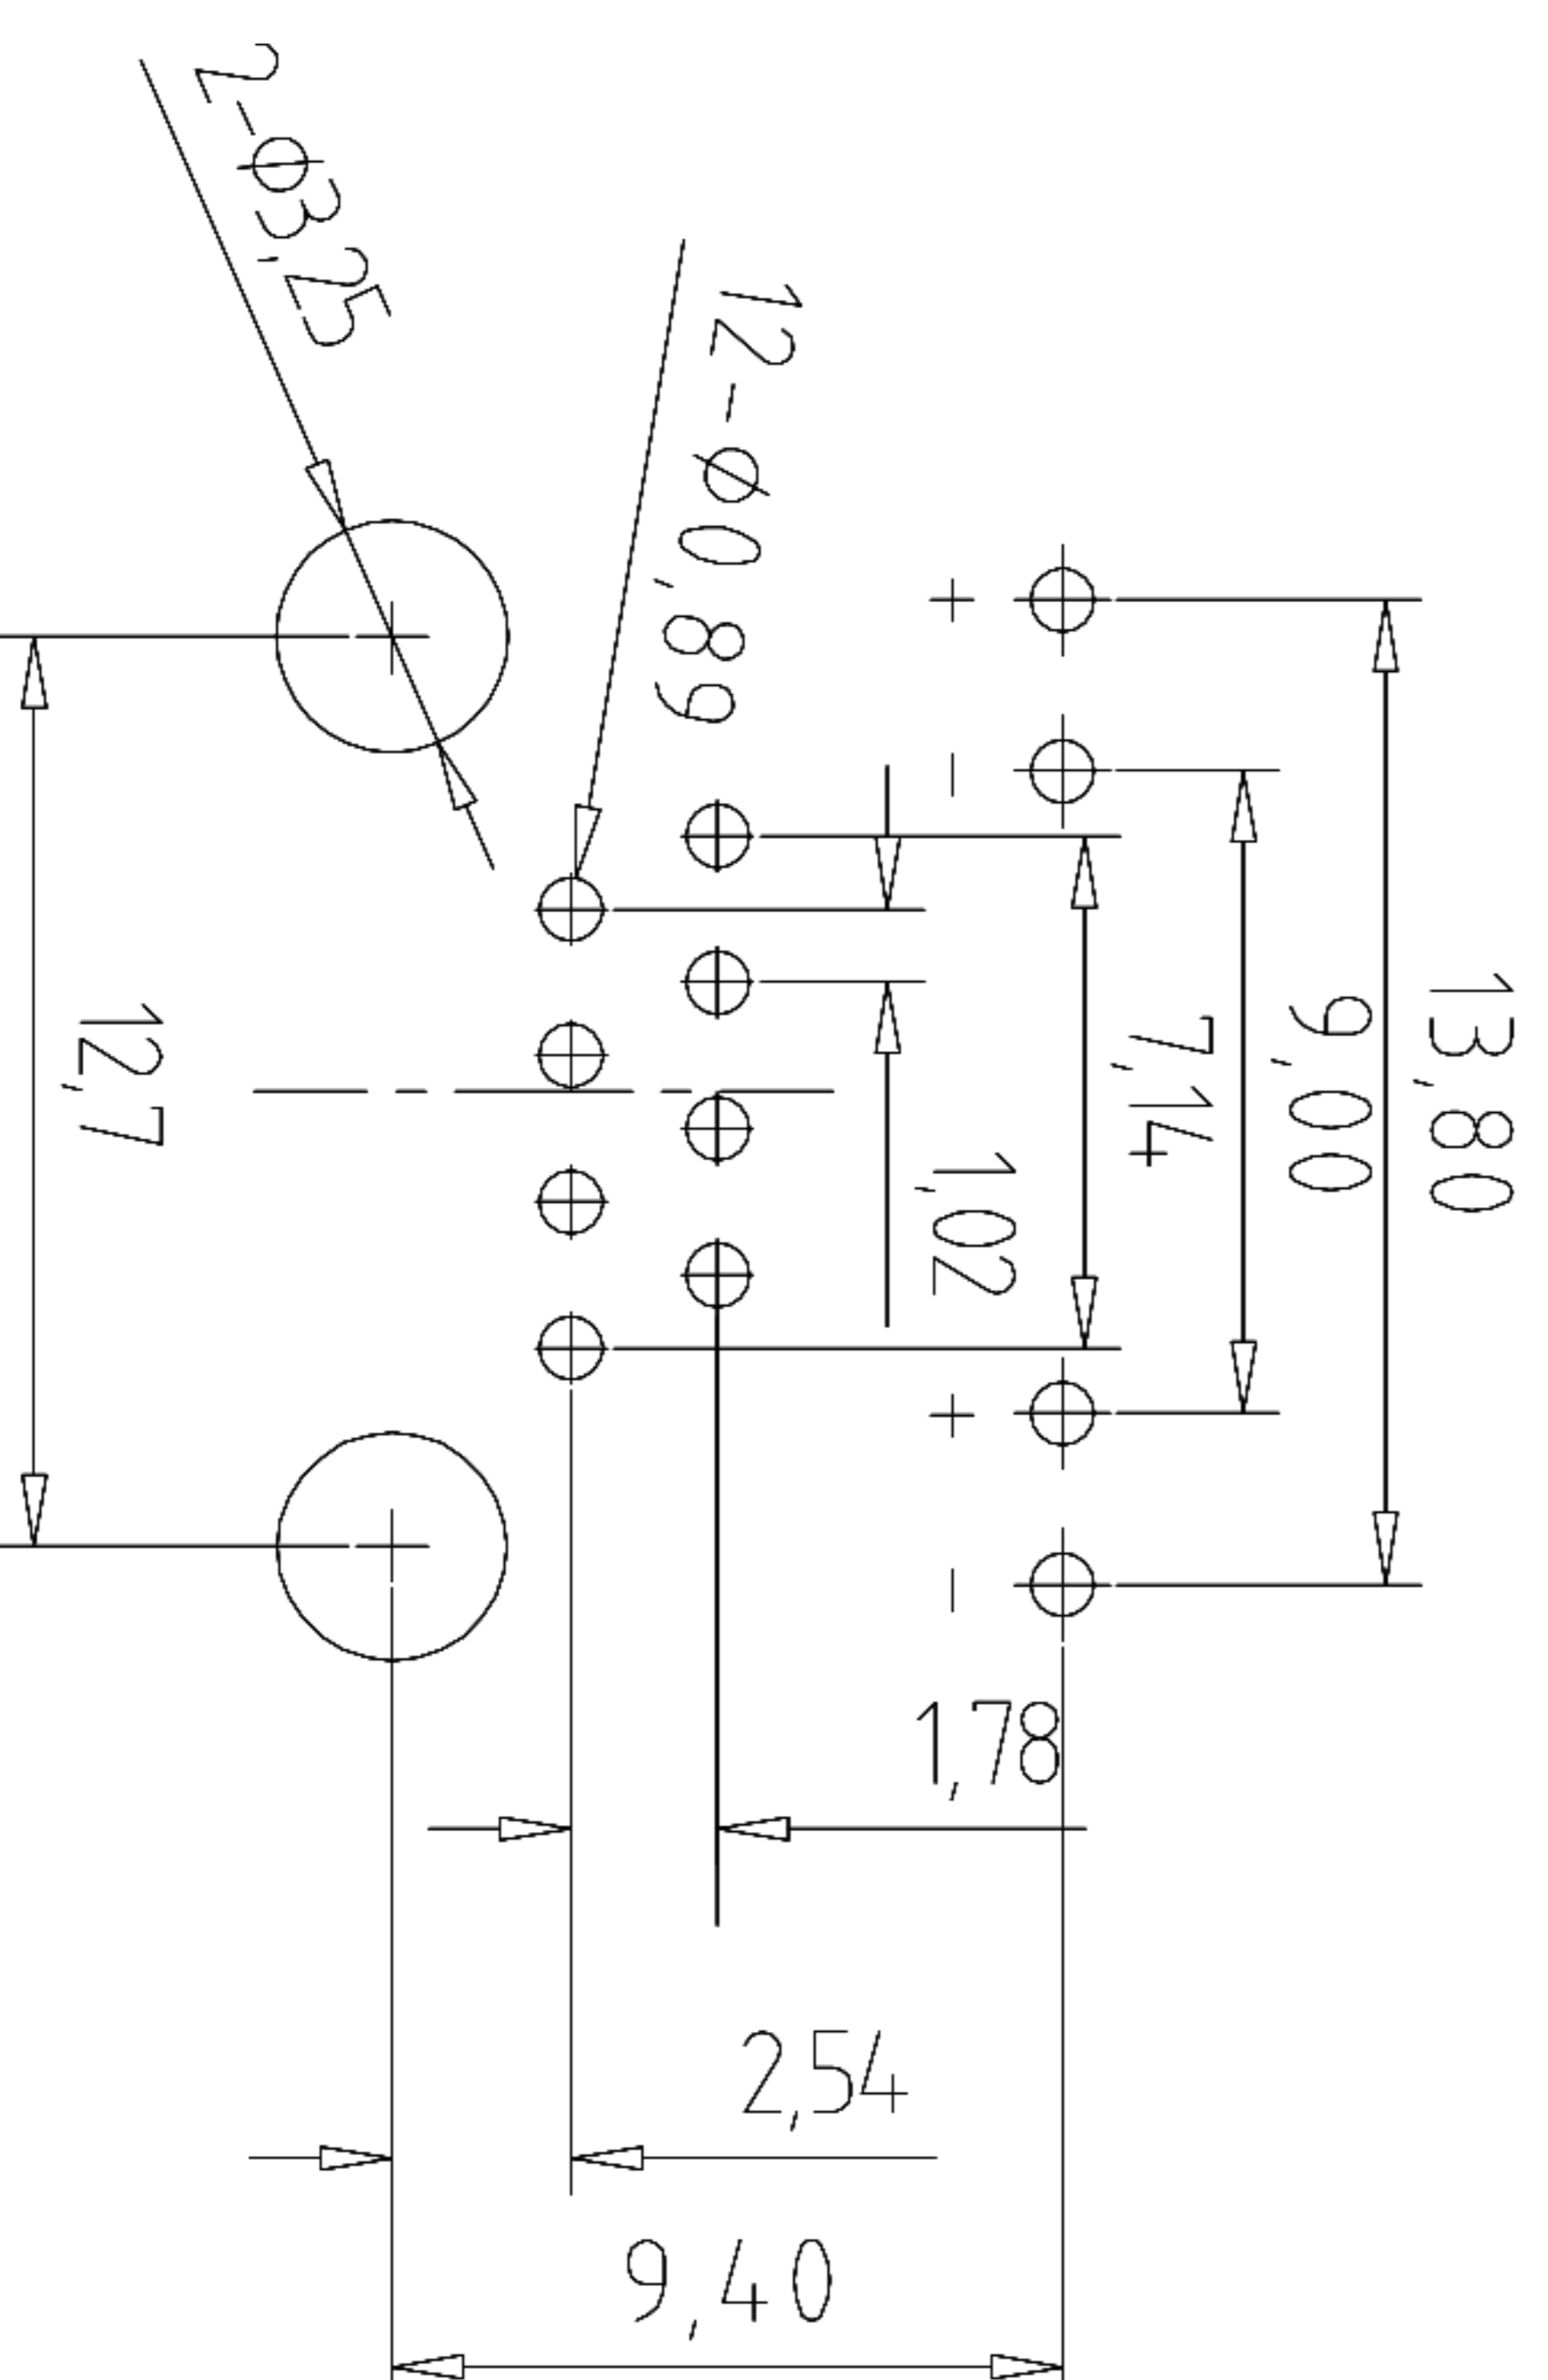


A-A

**SPECIFICATIONS:**

1. Voltage: 125V AC RMS
2. Current Rating: 1.5A
3. Contact Resistance: 40mΩ MAX.
4. Insulation Resistance: 500MΩ/MIN.
5. Dielectric Withstand Voltage : 500V DC
6. Operate Temperature: -40°C~80°C
7. Durability: 750 Mating Cycles MIN.

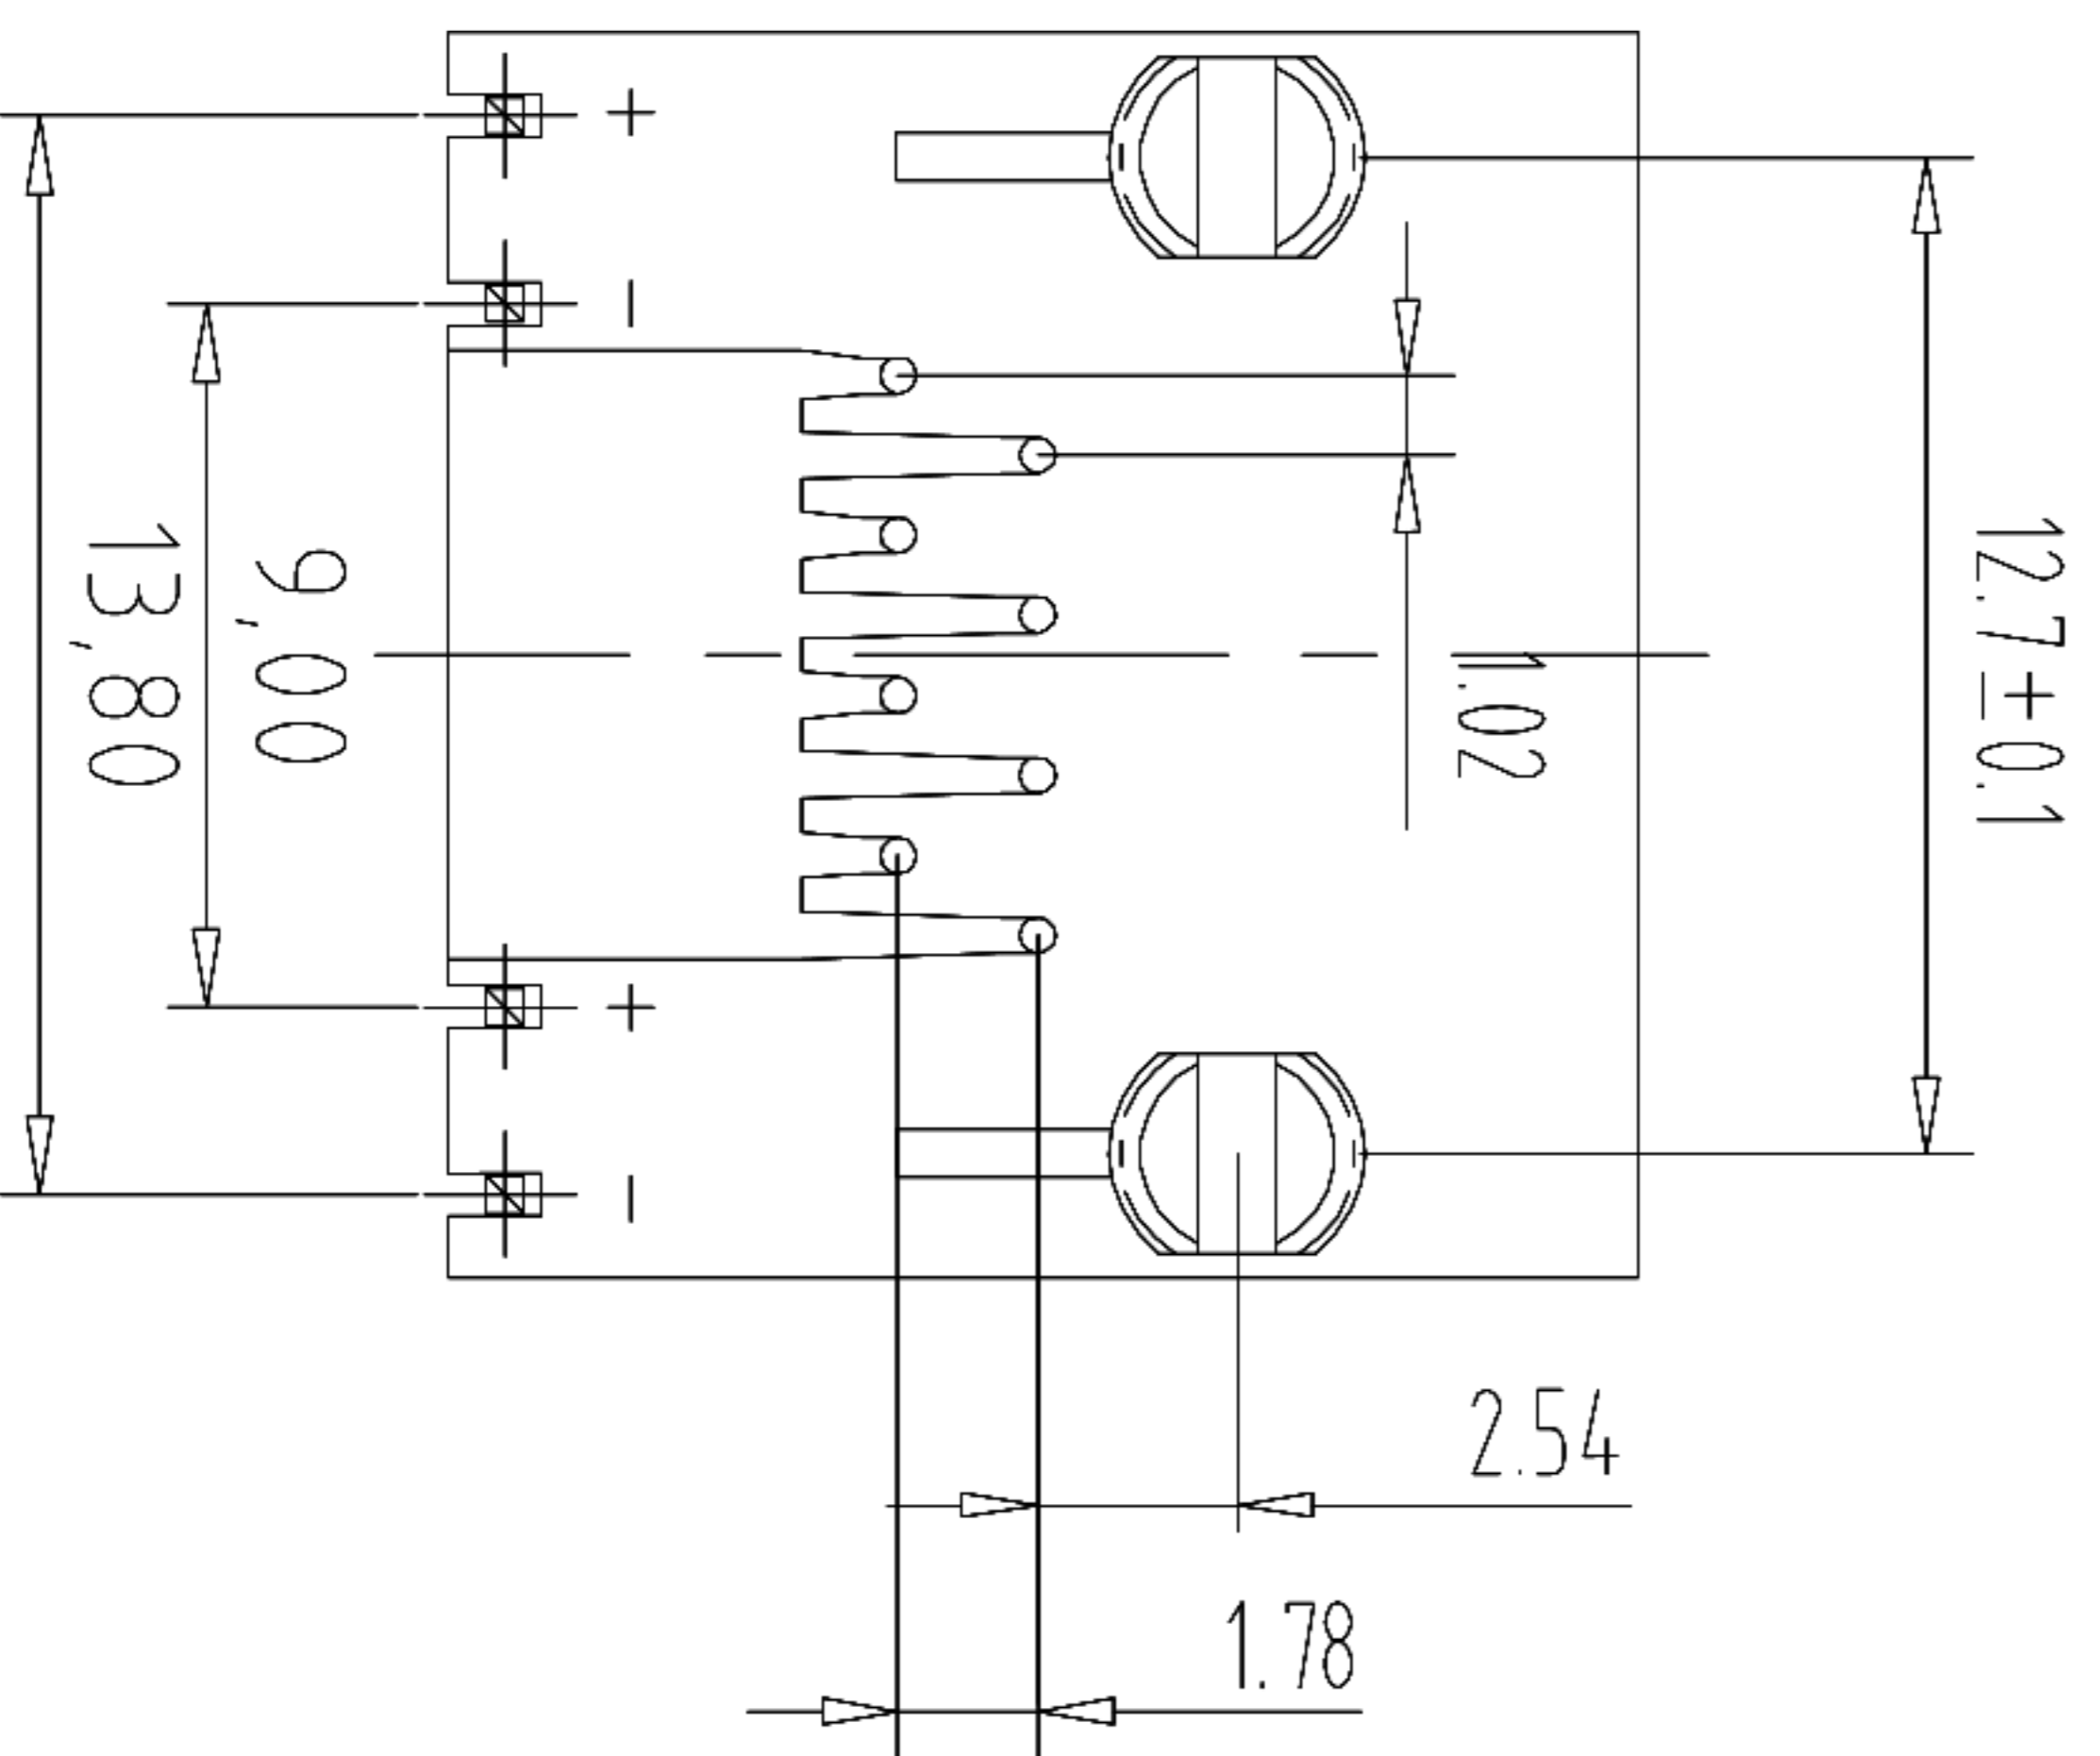

PC Board Layout  
Component Side Shown

5	LED	1	LED Lamp2(Right)	GREEN	
4	LED	1	LED Lamp1(Left)	YELLOW	
3	Shielding	1	Brass	Ni Plating	
2	Terminal	8	Phosphor Bronze	PLATING & COLOR	
1	Housing	1	PBT	BLACK	
NO. PART NAME		Q'TY		MATERIAL	
APPROVALS		DATE		Material & Plating	
DRAWN		DATE		Remark	
ZHWELCHEN		2015.07.07			



**深圳市联丰电子有限公司**  
SHENZHEN LINFENGYING ELECTRONIC CO.,LTD

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

TOLERANCES ARE	30°	±0.30	ANGLE	PART NO.	RJ CONNECTOR
	10°-30°	+0.20		UNIT: mm	
	5°-10°	+0.15	±2°	SCALE: 1:1	
	-5	-0.10		DRAWING NO.	
				PROJ.	
				SHEET	1 OF 1